


FQ Series Quiet Ventilating Fans



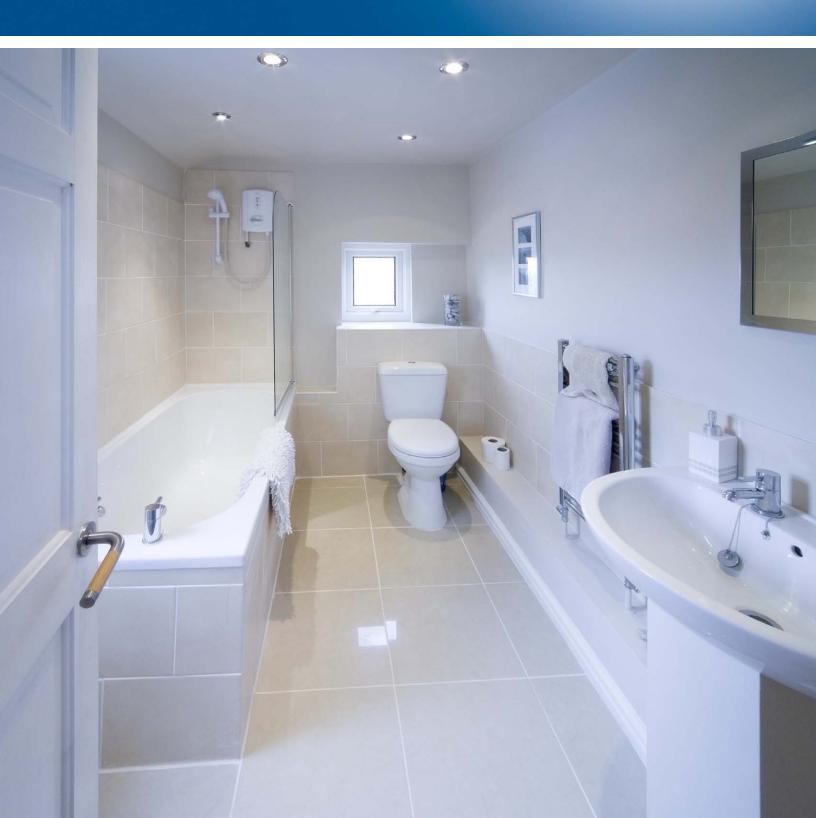

FQ Series Quiet Ventilating Fans

The FQ Series exhaust fans and fan lights provide remarkably quiet, energy efficient ventilation for baths, powder rooms and other areas. Super quiet with as low as < 0.3 sones sound rating. Air performances of 80 to 110 CFM. Fans are designed for intermittent or continuous operation to meet **ASHRAE Standard 62.2**.


- Low profile grille fastened with torsion springs
- Thermal overload protection
- UL Listed for use over a tub/shower with a GFCI branch circuit wiring
- · All models are HVI certified for sound and air performance
- 5 year warranty

Specification Data

Model	Duct ⁺ size	Rated power	Voltage / phase	0.1" P _s	0.2" P _s	0.3" P _s	0.4" P _s	Lamp power (Main / Night)	Sones	Shipping weight
	inch	W	V / ~	cfm				W CFL		lbs
FQ 80	4	25	120 / 1	80	68	56	43	-	< 0.3	12
FQ 80FL	4	25	120 / 1	80	73	60	47	26 / 4	0.4	14
FQ 110	4	30	120 / 1	110	100	85	70	-	0.7	13
FQ 110FL	4	30	120 / 1	110	100	85	70	26 / 4	1.3	14

Performance shown is for installation type D - Ducted inlet, Ducted outlet. Performance is based on actual speed of test. Performance ratings do not include the effects of appurtenances in the airstream. ⁺ Duct connections are 1/8" smaller than duct size.

Dimensions

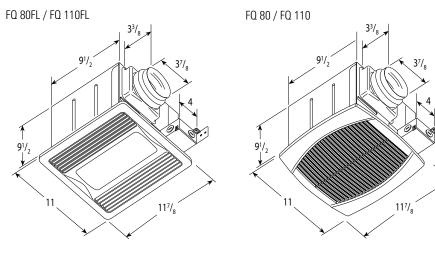

Dimensional information is in inches.

Customer Support: Canada 800.565.3548 • USA 800.747.1762 • support@fantech.net • www.fantech.net

Fantech, reserves the right to modify, at any time and without notice, any or all of its products' features, designs, components and specifications to maintain their technological leadership position.

Unlit models are ENERGY STAR® qualified, Title 24 compliment and meet the Washington State Ventilation and Indoor Air Quality Code.



The FQ-FD radiation damper together with the FQ fan will be a perfect combo that will win the multifamily orders

for you.



