



Fantech

Energy Recovery Ventilator

SER Series

SER 1504, SER 1504N, SER 2004,
SER 2004N, SER 3204D & SER3204N



Incoming fresh outdoor air is filtered then cooled and dehumidified by the stale outgoing air, as it passes through an enthalpy energy recovery core. The ERV then distributes the conditioned air throughout the home by direct ductwork installed specifically for the ERV or through the ductwork of a forced-air system.

SPECIFICATIONS

CASE 22 gauge galvanized steel on the SER 2004/2004N; 24 gauge galvanized steel on the SER 1504/1504N; 20 gauge galvanized steel on the SER 3204D/3204N. Baked powder coated paint, antique white. Insulated with foil-faced 1" (25 mm) high density polystyrene foam to prevent condensation and meet the requirements of the Underwriters Laboratories 94HF.

MOTORS German-manufactured, factory balanced ebm motors with backward curved blades and permanently lubricated sealed bearings. Engineered to run over 100,000 hours continuously. Motor warranty 7 years.

CORE Semi-permeable energy recovery cores configured for an efficient cross-flow ventilation. Manufactured to withstand extreme temperature variations. Core warranty 5 years.

FILTERS Washable Electrostatic Panel Type Air Filters.

CONTROLS External three (3) position (Low/Stand By/Medium) rocker switch that will offer continuous ventilation. Fantech offers a variety of external controls. (see optional controls) External dry contacts provided.

DEFROST The SER 1504, SER 2004 and SER 3204D have a built-in defrost mechanism that activates at 23°F (-5°C) in order to prevent the energy transfer core from freezing. They also include a condensate drain pan & spout.

SERVICEABILITY Core, filters, and motors can be easily serviced through latched access door. Electrical box, placed on the outside of the unit, can also be easily accessed.

FEATURES

- Simple Yet Sophisticated Design Makes These Units the Most Reliable HRVs on the Market
- Enthalpy Core
- EBM Motors with Backward Incline Propellers
- Steep Fan Curves for Superior Airflow Performance
- No Balancing Required
- Insulated with 1" (25mm) Foil-Faced High Density Polystyrene Foam
- No Drain Needed on SER 1504N, SER 2004N, SER 3204N

OPTIONAL CONTROLS


- EDF 1 – On/Off, Low, High Speed Operation and 20 min. On/40 min. Off Cycle Timer
- RTS 3 – Intermittent Bathroom Timer with Settings for 20/40/60 Minutes of High Speed Boost
- EDF 2 – Digital Multi-Function Control
- RTS 2 – 15 Minute Pushbutton Timer
- AQS 1 – Air Quality Sensor

Core: Energy Recovery Units feature a limited 5 year warranty on the enthalpy core.

Washable Electrostatic Filters

Superior EBM Motors: Units are designed with German manufactured EBM external rotor motorized impellers – the most durable motors in the industry. Precise balancing ensures vibration-free operation. No maintenance needed. 7 Year Limited Warranty.

www.fantech.net

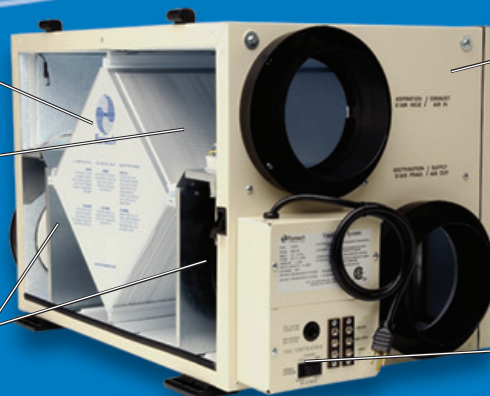

Fully Insulated Cabinet:

Baked powder-coat finish. Insulated with 1" (25mm) foil-faced, high density polystyrene foam. For quiet, trouble-free operation.


Electronic Control Board:

Units feature state-of-the-art control boards for easy connection to existing HVAC equipment. All units are designed for easy operation from a series of optional remote controls.


info@fantech.net

SER 1504, SER 1504N, SER 2004, SER 2004N, SER 3204D & SER3204N Energy Recovery Ventilators

Dimensions

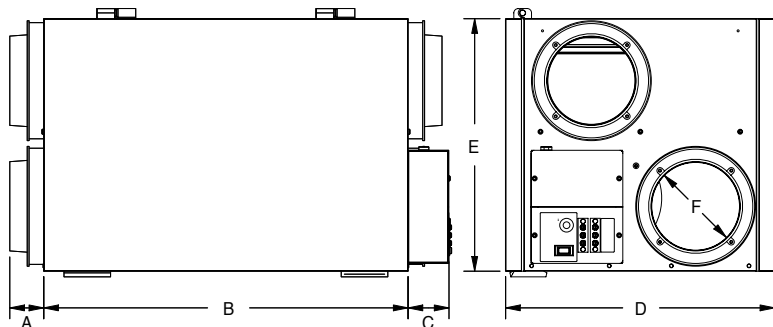


Airflow

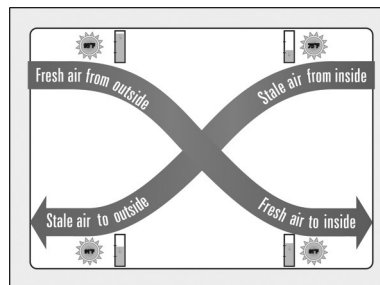

Model	SER 1504/1504N	SER 2004/2004N	SER 3204D/3204N
A	2 1/4" (56mm)	2 1/4" (56mm)	2 1/4" (56mm)
B	23 1/2" (596mm)	27 7/8" (707mm)	27 7/8" (707mm)
C	2 5/8" (67mm)	2 5/8" (67mm)	3" (75mm)
D	17 3/8" (441mm)	17 3/8" (441mm)	25 3/8" (645mm)
E	16 1/8" (413mm)	20 1/2" (520mm)	20 1/2" (520mm)
F	6" (152mm)	6" (152mm)	8" (203mm)

Fan Performance

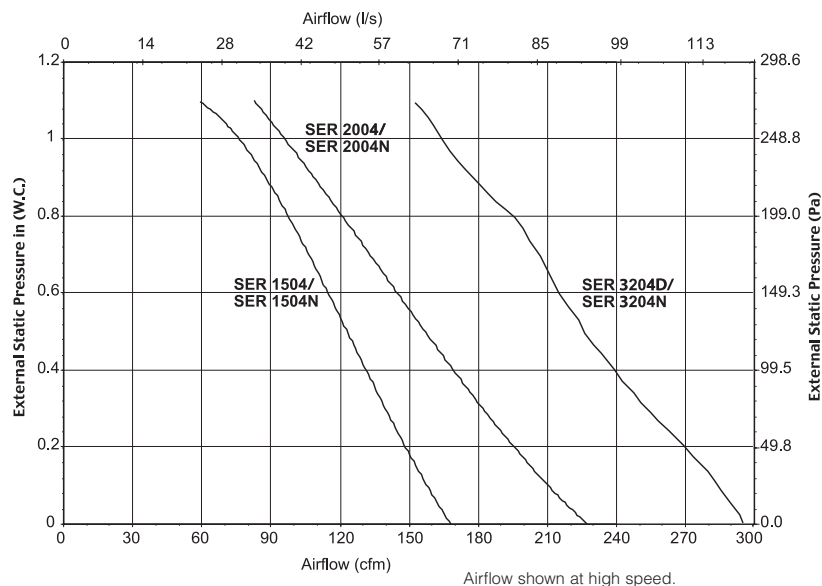

Performance Data

Model	Total Recovery Efficiency at 95°F (35°C)	Net Moisture Transfer % at 32°F (0°C)
SER 1504/1504N	49%	58%
SER 2004/2004N	57%	62%
SER 3204D/3204N	49%	71%

Power

- Volts 120 VAC
- Amperage
 - SER 1504/1504N 1.5 Amps
 - SER 2004/2004N 1.9 Amps
 - SER 3204D/3204N 2.5 Amps
- Phase Single Phase



Submitted by:	Date:
Qty:	Model #:
Comments:	
Project #:	
Location:	
Architect:	
Engineer:	
Contractor:	



Fantech

United States

1712 Northgate Blvd. • Sarasota, FL. 34234
 (T) 1.800.747.1762 • (F) 1.800.487.9915
 (T) 1.941.309.6000 • (F) 1.941.309.6099
www.fantech.net • info@fantech.net

Canada

50 Kanalfakt Way, Bouctouche, NB E4S 3M5
 (T) 1.800.565.3548 • (F) 1.877.747.8116
 (T) 1.506.743.9500 • (F) 1.506.743.9600
www.fantech.ca • info@fantech.ca

Fantech, reserves the right to modify, at any time and without notice, any or all of its products' features, designs, components and specifications to maintain their technological leadership position.

Item #: 411530
 Art.#: 600669
 Rev Date: 011806