

DATA SHEET

# Si-HH3

## Thermo-hygrometer



Backlit LCD screen



Calculated values on mobile App



Magnetic backing for easy fixing



Carrying bag



Si-HVACR Measurement MobileApp



### Technical specifications

Parameters	Measuring units	Accuracy*	Measuring range	Resolution
Relative humidity	%RH	±2%RH at 25°C (5 to 95%RH)	from 0 to 100%RH	0.1%RH
Dew point**	°C <sub>Td</sub> / °F <sub>Td</sub>	-	from -40 to +60°C <sub>Td</sub> from -40 to 140°F <sub>Td</sub>	0.1°C <sub>Td</sub> / 0.1°F <sub>Td</sub>
Absolute humidity***	g/m <sup>3</sup>	-	from 0 to 600 g/m <sup>3</sup>	0.1 g/m <sup>3</sup>
Enthalpy***	kJ/kg	-	from 0 to 10000 kJ/kg	0.1 kJ/kg
Mixing ratio***	g/kg	-	from 0 to 10000 g/kg	0.1 g/kg
Wet bulb temperature**	°C <sub>Tw</sub> / °F <sub>Tw</sub>	-	from 0 to 60°C <sub>Tw</sub> from 32 to 140°F <sub>Tw</sub>	0.1°C <sub>Tw</sub> / 0.1°F <sub>Tw</sub>
Temperature	°C, °F	±0.5°C ±0.9°F	from -20 to +60°C from -4 to 140°F	0.1°C / 0.1°F

\*All the accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions.

\*\*Calculated values

\*\*\*Calculated values, only available on the app

Google Play and the Google Play logo are trademarks of Google LLC.

App Store is a service mark of Apple Inc.

## General features

Measuring element	Hygrometry: capacitive sensor Temperature: NTC
Display	Integrated 2-line LCD 7 segment monochrome display with backlight
Housing	ABS-PC and TPE, IP20
Keypad	1 ON/OFF & Backlight button 1 Hold/Min/Max/Live & value button
Standards & Directives	2011/65/EU RoHS II (EU)2015/863; 2012/19/EU WEEE; 2014/53/EU RED
Power supply	3 alkaline batteries LR03 AAA 1.5 V
Battery life	250 hours* (without backlight and without wireless communication)
Wireless communication	Range frequency from 2402 MHz to 2480 MHz with a transmit power of 0 dBm. Range up to 15 m (98 ft), depending on smartphone radio strength. Minimum required versions: Android 5.0, iOS 12.4, BLE 4.0
Ambiance	Air and neutral gas
Operating conditions	From -10 to +60°C (14 to 140°F). In non condensing conditions. Altitude: from 0 to 2000 m (6561').
Storage temperature	From -20 to +70°C (-4 to 158°F)
Auto shut-off	10 minutes (can be deactivated)
Weight (with batteries)	200 g (7 oz)

\*Battery life given at 20°C (68°F) with alkaline batteries.


## Si-HVACR Measurement MobileApp

The Si-HVACR Measurement MobileApp allows to view and record measurements in real-time.

Main features:

- Easily view different parameters
- Browse saved measurements history and data graphs (average, min & max values, etc.)
- Create reports (PDF, CSV, or XML) and add up to four (4) photos

## Dimensions

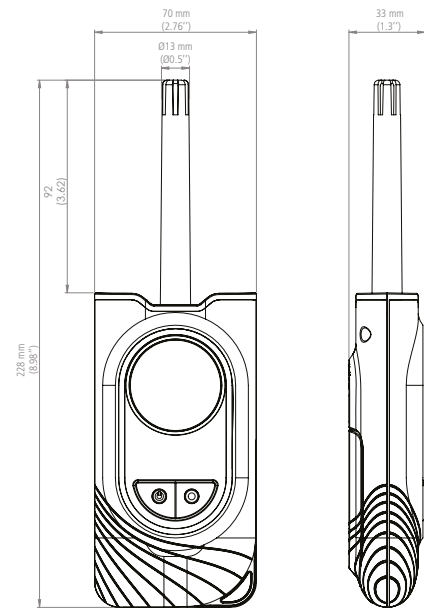

## Kit content

- Certificate of conformity
- Quick Start Guide
- 3 alkaline batteries LR03 AAA 1.5 V
- Carrying bag

## Warranty

Instruments have 2-year guarantee for any manufacturing defect.