


SUBMITTAL DATA

JOB/CUSTOMER:	SUBMITTED BY:
ENGINEER:	APPROVED BY:
CONTRACTOR:	ORDER NO:
SPECIFICATION REFERENCE:	

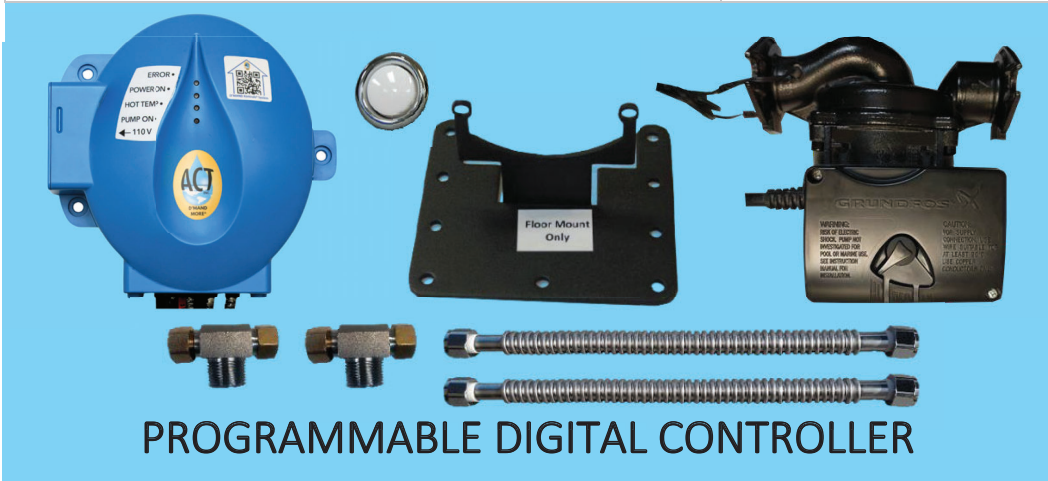

PROGRAMMABLE DIGITAL CONTROLLER

OPTIONAL ACCESSORIES

- Hardwired LED Button
- Hardwired LED Rocker Switch
- Hardwired Motion Sensor
- Bluetooth Wireless Transmitter Kit
- Bluetooth Wireless Motion Sensor
- Bluetooth Repeater


INCLUDES

- The Original D'MAND KONTROLS® System* Standard package comes with:
- (1) ACT2 Control Box w/ power cord, activation wires
 - (1) SS3-200 Pump
 - (1) Integrated Bluetooth Activation
 - (2) Stainless Steel Tees 1/2" x 1/2" x 3/4"
 - (1) Large Mounting Bracket
 - (1) Integrated Check Valve
 - (1) Integrated Temperature Sensor
 - (2) Flanges with Bolts and Nuts
 - (2) 3/4" x 18" Flex Lines
 - (1) Hardwired Activation Button
 - (1) Anchor Pack

TECHNICAL DATA

FLOW RANGE: 0-33 GPM	MAX. WORKING PRESSURE: 145 PSI
HEAD RANGE: 0-29 Ft.	CONNECTORS: GF 15/26 Flange (With 3/4" Stainless Steel MIP not shown in picture)
MOTORS: 2-POLE SINGLE PHASE	RPM/HP: 3450/.262hp
MIN. FLUID TEMPERATURE: 36°F	VOLTAGE (max. spd.): 115V/197 watts/1.80 Amps
MAX. FLUID TEMPERATURE: 230°F	APPROX SHIP WEIGHT: 16 LBS

DIMENSIONS

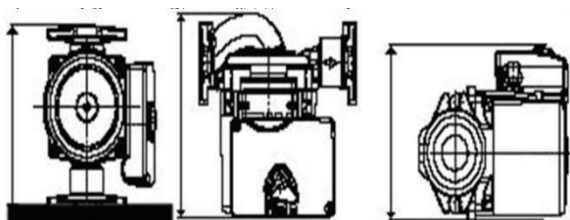

PERFORMANCE CHART

