


SUBMITTAL DATA

JOB/CUSTOMER:	SUBMITTED BY:
ENGINEER:	APPROVED BY:
CONTRACTOR:	ORDER NO:
SPECIFICATION REFERENCE:	

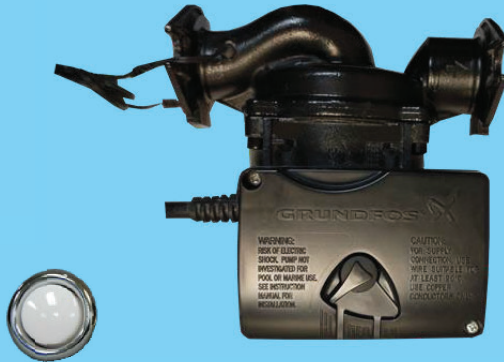

OPTIONAL ACCESSORIES

- Hardwired LED Button
- Hardwired LED Rocker Switch
- Hardwired Motion Sensor
- Bluetooth Wireless Transmitter
- Bluetooth Wireless Motion Sensor
- Bluetooth Repeater
- Under Sink Mounting Kit (For Systems w/o Return Lines)

PROGRAMMABLE DIGITAL CONTROLLER

INCLUDES


The Original D'MAND KONTROLS® System Standard package comes with:

(1) ACT2 Control Box w/ power cord, activation wires	(2) Flanges with 4 Bolts and 4 Nuts
(1) SS3-200 Pump	(1) Hardwired Activation Button
(1) Integrated Bluetooth Activation	(1) Anchor Pack
(1) Integrated Check Valve	

TECHNICAL DATA

FLOW RANGE: 0-33 GPM	MAX. WORKING PRESSURE: 145 PSI
HEAD RANGE: 0-29 Ft.	CONNECTORS: GF 15/26 Flange (With 3/4" Stainless Steel MIP not shown in picture)
MOTORS: 2-POLE SINGLE PHASE	RPM/HP: 3450/.262hp
MIN. FLUID TEMPERATURE: 36°F	VOLTAGE (max. spd.): 115V/197 watts/1.80 Amps
MAX. FLUID TEMPERATURE: 230°F	APPROX SHIP WEIGHT: 14 LBS

DIMENSIONS

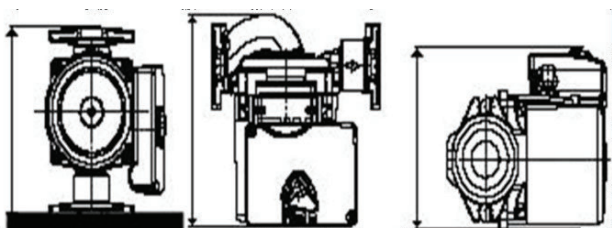

PERFORMANCE CHART

