




# 14" x 18" Gable Vent Model # GV2041-PG

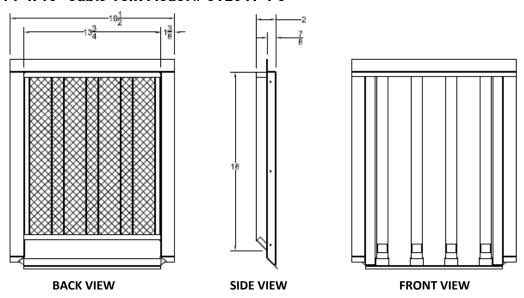

| Gable Vents                             | Model     | Size<br>W x L | NFVA Provided<br>(Sq In) | Flanges<br>Available         | Flange<br>Definition           | Weight |
|---|-----------|---------------|--------------------------|------------------------------|--------------------------------|--------|
|   | GV2041-PG | 14" x 18"     | 71.1                     | Plaster Ground/<br>J Channel | 7/8" Setback<br>with J Channel | 6lbs   |
| Custom sizes/shapes/materials AVAILABLE |           |               |                          |                              |                                |        |

## **BENEFITS:**

- Safety vents that are used in areas prone to wildfires, wind driven rain, or winddriven snow.
- **Triple Protection (Patented)** 
  - Overlapping baffles resist embers, flames and radiant heat
  - Heat activated Intumescent Strips expand & seal openings during extreme fire conditions
  - 1/16" mesh on back side of vent for additional ember and bug protection
- WUI Approved for use throughout California and beyond (Calfire BML Approval # 8165-2232:0502)
- Tested and Listed to ASTM E2886/2912
- 1 hour Fire Rated per ASTM E119
- Tested to Miami Dade County Driving Rain up to 140mph with no rain intrusion
- Air Flows through normally
- Also Prevents Rodent Entry
- Easy to Install, Retrofit and Paint

## STANDARD MATERIALS

ASTM A653/A653M- G90 hot dipped galvanized steel, 26GA ASTM D9092- mill phosphatized coating for painting. IF BONDERIZED ASTM b370- Sheet Copper, 16oz and 20oz IF GALVANIZED .0625 x.0625 hot dipped galvanized 23ga wire mesh

### Installation:

Install like any other similar Ventilator Product on the market.