




SUB BASE FOR DORMER, TURBINE, LOW PROFILE AND/OR OTHER ROOF VENTS Model # SB2011*

*NOT TO BE USED WITH Brandguard Dormer Vents

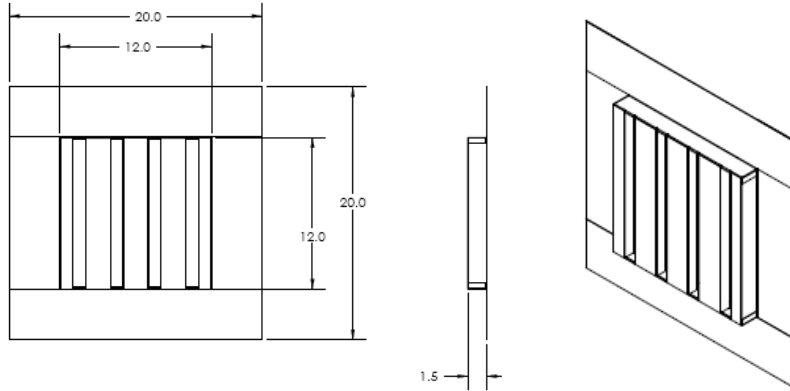

Sub Base for Dormer Vents	Model	Size W x H	Flanges Available	Flange Definition	Weight
* To be used with Dormer, Turbine, or other Field Vents	SB2011	12" x 12"	Sub Flashing	As Shown	5lbs

BENEFITS:

- Safety vents that are used in areas prone to wildfires, wind driven rain, or winddriven snow.
- Overlapping Baffle Protection (Patented)
 - Air Flows through normally
 - Resists the intrusion of Flame and Embers, Wind Driven Rain and Wind Driven Snow
- WUI Compliant and with California Ch7a Building Code
- Anti -Clogging Overlapping Baffles plus 1/8" mesh on back side of vent
- Prevents Rodent Entry
- 20 Year FULL Warranty
- Easy to Install, from inside or outside the attic

STANDARD MATERIALS

ASTM A653/A653M- G90 hot dipped galvanized steel, 26GA
 ASTM D9092- mill phosphatized coating for painting. IF BONDERIZED
 ASTM b370- Sheet Copper, 16oz and 20oz IF GALVANIZED
 .025 x.025 hot dipped galvanized 23ga wire mesh

Installation:

Install with Dormer, Turbine, Mushroom, or other applicable commodity field vents from either the interior or exterior of the attic. Do **NOT** install with Brandguard Dormer Vent. Brandguard Dormer Vents can be used with a standard 1/16"-1/8" Mesh Sub Base.

EXAMPLES OF INTERIOR ATTIC INSTALLATION:

