

22-1/8" Depth, 6" High	MODEL
<ul style="list-style-type: none"> ◆ 750± CFM ◆ 7" Round Duct 	<p>C2030PS-SS C2036PS-SS C2042PS-SS C2048PS-SS</p>
<ul style="list-style-type: none"> ◆ 900± CFM ◆ 8" Round Transition 	<p>C2030PS-8-SS C2036PS-8-SS C2042PS-8-SS C2048PS-8-SS</p>
<ul style="list-style-type: none"> ◆ 1000± CFM ◆ 10" Round Transition 	<p>C2030PS-K-SS C2036PS-K-SS C2042PS-K-SS C2048PS-K-SS</p>
<ul style="list-style-type: none"> ◆ 1270± CFM ◆ Two 7" Round Ducts 	<p>C2036PS1-TW-SS C2042PS1-TW-SS C2048PS1-TW-SS C2054PS1-TW-SS C2060PS1-TW-SS</p>
<ul style="list-style-type: none"> ◆ 1520± CFM . ◆ Two 8" Round Transitions 	<p>C2036PS1-TW-8-SS C2042PS1-TW-8-SS C2048PS1-TW-8-SS C2054PS1-TW-8-SS C2060PS1-TW-8-SS</p>
18-1/8" Depth, 6" High	MODEL
<ul style="list-style-type: none"> ◆ 635± CFM ◆ 7" Round Duct, 4.25" Off Center 	<p>C2030BP1-SS C2036BP1-SS C2042BP1-SS</p>
<ul style="list-style-type: none"> ◆ 735± CFM ◆ 7" Round Duct 	<p>C2030BP-SS C2036BP-SS C2042BP-SS C2048BP-SS</p>
<ul style="list-style-type: none"> ◆ 880± CFM ◆ 8" Round Transition 	<p>C2030BP-8-SS C2036BP-8-SS C2042BP-8-SS C2048BP-8-SS</p>
<ul style="list-style-type: none"> ◆ 990± CFM ◆ 10" Round Transition 	<p>C2030BP-K-SS C2036BP-K-SS C2042BP-K-SS C2048BP-K-SS</p>
<ul style="list-style-type: none"> ◆ 1250± CFM ◆ Two 7" Round Ducts 	<p>C2036BP1-TW-SS C2042BP1-TW-SS C2048BP1-TW-SS C2054BP1-TW-SS C2060BP1-TW-SS</p>
<ul style="list-style-type: none"> ◆ 1500± ◆ Two 8" Round Transitions 	<p>C2036BP1-TW-8-SS C2042BP1-TW-8-SS C2048BP1-TW-8-SS C2054BP1-TW-8-SS C2060BP1-TW-8-SS</p>



C2000 Mesh Filters

FEATURES:

- ◆ Variable Controls
- ◆ Sones: 1.5 to 4.6
- ◆ Filters: Aluminum Mesh
- ◆ Front Panel Lighting: 38 Watt Halogen Included.
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. Suggested use with 15 Amp Circuit
- ◆ Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees.
- ◆ Suggested Distance Codes: 36" above cooking surface.


OPTIONS:

- ◆ 9.5 Watt LED available. (50 Watt Halogen Equivalent)
30" to 48" Hoods take 2 Bulbs (1 Set)
54" to 60" Hoods take 4 Bulbs (2 Sets)
- ◆ Flange for the perfect fit if needed.
- ◆ Transition.
- ◆ Remote wiring.

NO Performance Warranty over BBQ Grills/Griddles.



Ventilator Insert, Mesh Filters, Specifications C2000PS, C2000PS-8, C2000PS-K

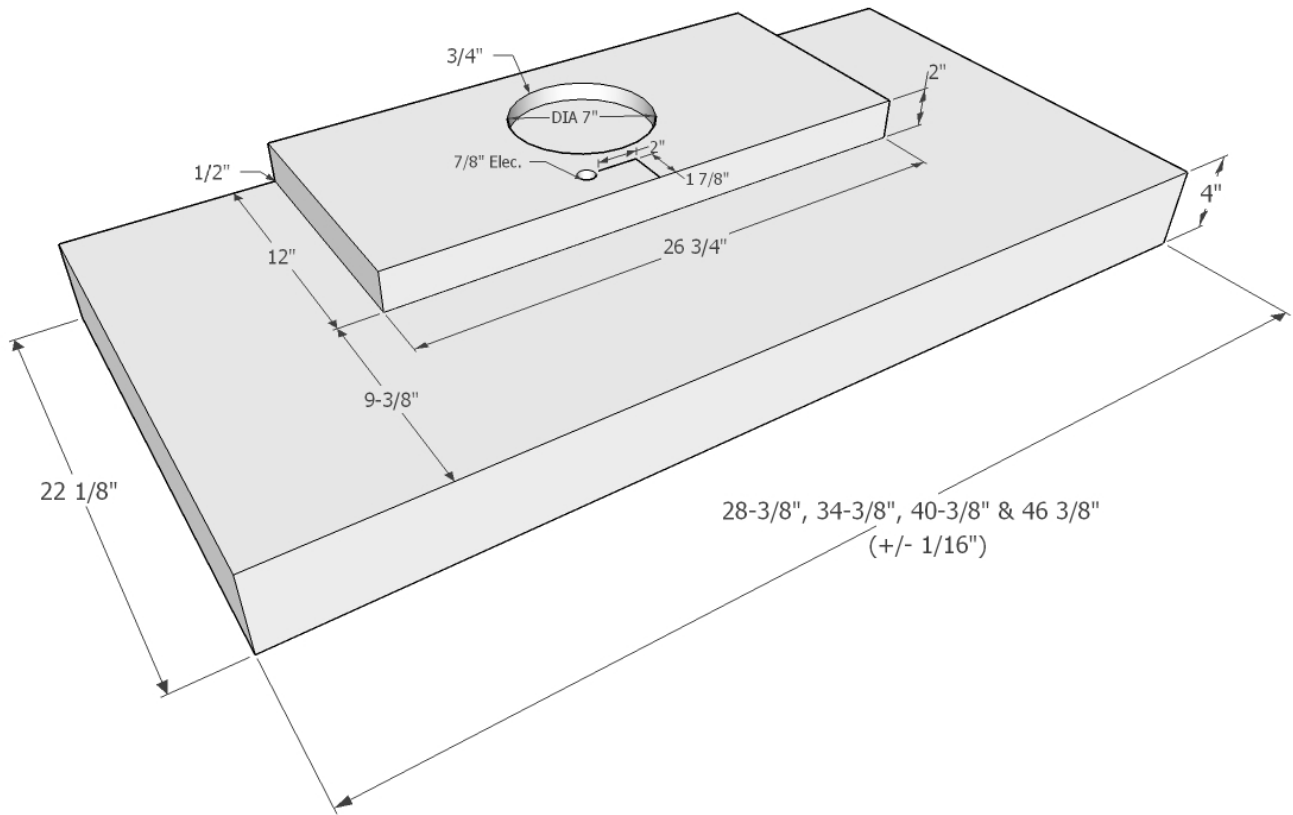

TRANSITION

Example: C2036PS-8
Vent Size 8" Round x 3-1/2" High



Example: C2042BP-K
Vent Size 10" Round x 7" High



SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.