

18-1/8" Depth, 6" High	MODEL
<ul style="list-style-type: none"> ◆ 360± CFM @ 2.5 to 4.9 Sones ◆ 7" Round Duct 	<p>C2030SD2-SS C2036SD2-SS C2042SD2-SS</p>
<ul style="list-style-type: none"> ◆ 430± CFM @ 2.5 to 7.6 Sones ◆ 7" Round Duct 	<p>C2030SD4-SS C2036SD4-SS C2042SD4-SS C2048SD4-SS</p>
12" Depth, 6" High	MODEL
<ul style="list-style-type: none"> ◆ 430± CFM @ 2.5 to 7.6 Sones ◆ 7" Round Duct 	<p>C2024SD4-12-SS C2030SD4-12-SS C2036SD4-12-SS C2042SD4-12-SS</p>
18-1/8" Depth, 6" High Non Vented	MODEL
<ul style="list-style-type: none"> ◆ Elbow Transition Included ◆ Charcoal Combo Filters 	<p>C2030SD2-NV-SS C2036SD2-NV-SS C2042SD2-NV-SS</p>



C2000SD2



C2000SD4



C2000SD4-12

Powered Liner — C2000 Air Ring Fan
Slim Baffle Series

18-1/8" Depth, 6" High Slim Baffle	MODEL
<ul style="list-style-type: none"> ◆ 390± CFM @ 2.5 to 7.6 Sones ◆ 7" Round Duct <p>C2000SD4SB is designed to meet the Builder Code of 400 CFMs without a make-up air kit.</p>	<p>C2030SD4SB-SS C2036SD4SB-SS C2042SD4SB-SS C2048SD4SB-SS</p>
<ul style="list-style-type: none"> ◆ 325± CFM @ 2.5 to 4.9 Sones ◆ 7" Round Duct 	<p>C2030SD2SB-SS C2036SD2SB-SS C2042SD2SB-SS</p>


FEATURES:

- ◆ Variable or Rocker Controls.
- ◆ Center Panel Lighting: 38 Watt Halogen Included.
- ◆ Filters: Aluminum Mesh
- ◆ Filters: Slim Baffle
- ◆ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ◆ Suggested Distance Code: 30" above cooking surface.

OPTIONS:


- ◆ 7 Watt LED available. (50 Watt Halogen Equivalent)
Part # LBULB set of two.
- ◆ Flange for the perfect fit.
- ◆ Remote Wiring.

NO Performance Warranty over BBQ Grill/Griddle.

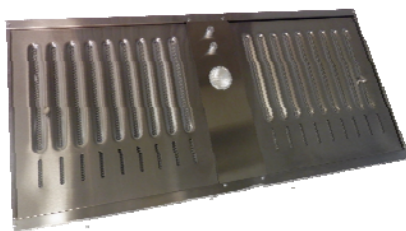

C2000SD4SB

Powered Liner Specifications

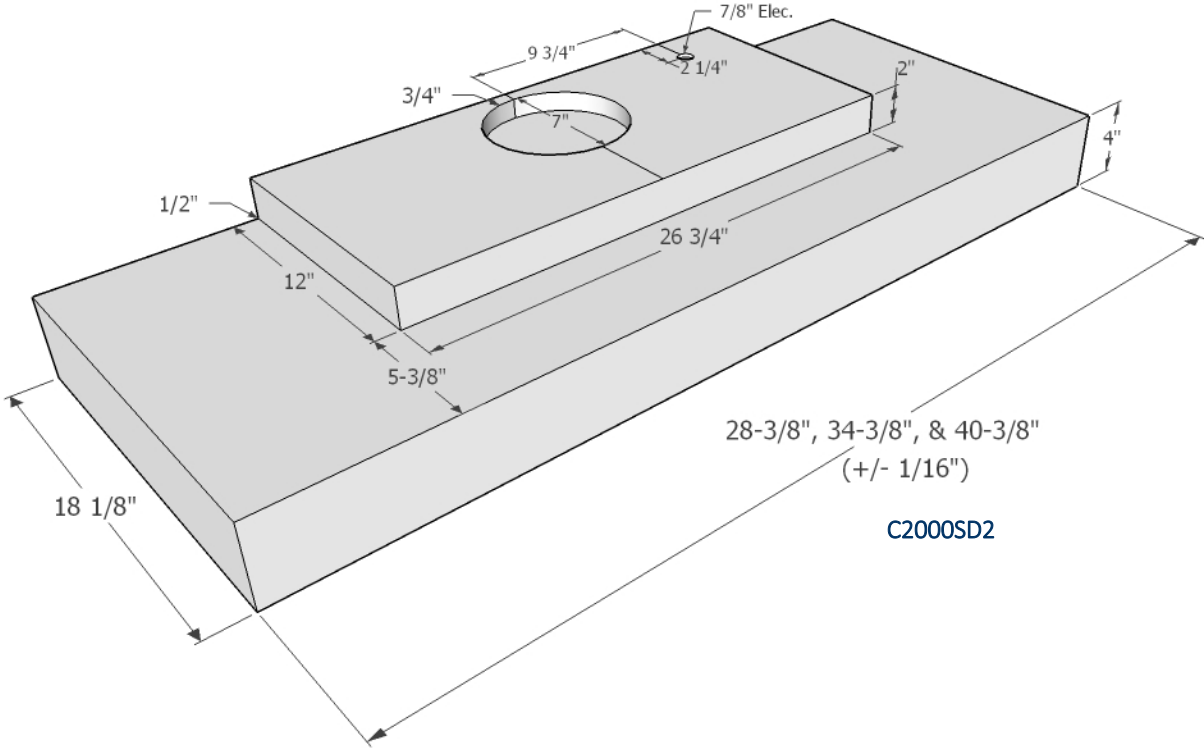

SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!
All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.