




-WARNING-
Sharp Edges

LT45 Instruction Sheet

Assembly

1. Bend all the tabs almost straight up with a flat screwdriver.
2. Mate the two parts so that the screw holes line up.
3. Secure the flanges with three sheet metal screws.
4. Bend the tabs down and tape the joints along the flange.

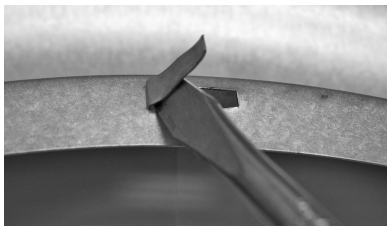

Installation

1. Model LT45 should be measured as .75 feet against the total allowable duct length. See engineering paperwork online at www.dryer-ell.com and 2009 IMC Table 504.6.4.1 and IRC Table M1502.4.4.1 for 10" radius fittings.
2. Arrow indicates airflow direction from dryer and provides for proper male and female connections.
3. For attic space installations, one LT45 can be used in the run so duct extends straight through a pitched roof.
4. Two LT45s can be used in conjunction to complete a ninety degree turn running diagonally to shorten total run length.

