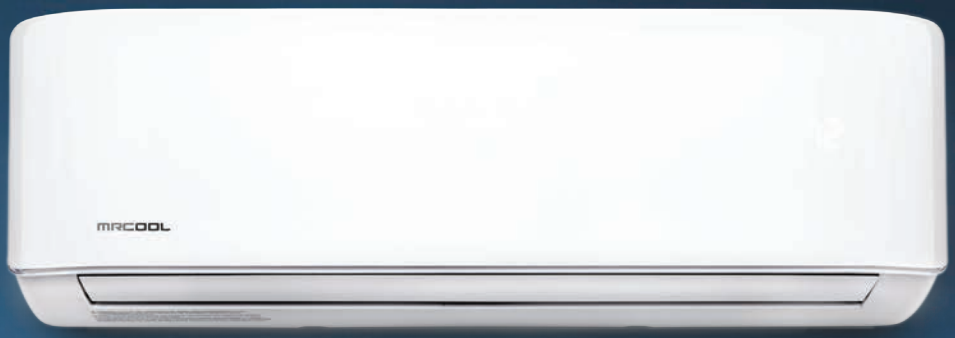

MRCOOL®

COMFORT MADE SIMPLE

2020 CATALOG

Residential Heating & Air Conditioning

Why?
MRCOOL

Comfort anywhere you need it

MRCOOL ductless mini-split air conditioners and heat pumps are the cutting edge of what modern, flexible fabrication can produce. These air conditioners rely on state-of-the-art manufacturing processes and advanced design to deliver high efficiency air comfort anywhere you need it.

PAGE OF CONTENTS

Product name	Page No.
Do-It-Yourself	1 - 2
Advantage	3 - 4
Olympus E STAR	5 - 6
Olympus Hyper Heat	7 - 8
Olympus Multi-zone	9 - 10
Signature Series - Package Heat Pump	11 - 12
Signature Series - Package Air Conditioner	13 - 14
Signature Series - Package Gas Electric	15 - 16
Signature Series - Air Conditioner Condenser	17 - 18
Signature Series - Heat Pump Condenser	19 - 20
Signature Series - Multi-Position Air Handler with TXV	21 - 22
Signature Series - Evaporator Coils	23 - 24
Signature Series - 80% AFUE Gas Furnace	25 - 26
Signature Series - Oil Furnace	27 - 28
Signature Series - 95% AFUE Gas Furnace	29 - 30
Signature Series - Electric Furnace Modular Air System	31 - 32
Geocool - Geothermal Heat Pump	33 - 34
Universal Series - Condenser	35 - 36
Universal Series - Air Handler	37 - 38
No-Vac® Quick Connect Line Set	39
Smart HVAC Ductless Ministat	40
WiFi Thermostat	41
Bladeless Fan	42
Cool Blade HVLS Fan	43
Special Truckload Orders	44 - 47
Accessories	48

7 YEAR COMPRESSOR WARRANTY

5 YEAR PARTS WARRANTY — 5 YEAR — GUARANTEED

Do-It-Yourself

A MRCOOL® DIY® Series heat pump is the only ductless mini-split system on the market explicitly designed for amateur installation. You don't need special tools or training to install this high efficiency heat pump.

JUST ASK amazon alexa

works with the Google Assistant

- Easy DIY® Installation
- Smartphone App
- Easy Quick Connect®
- Leakage Detection
- Low Ambient Cooling
- DC Inverter
- Gold Fin® Condenser
- Follow Me®

ENERGY STAR

SPECIFICATION

MODEL NO.	Indoor Unit Outdoor Unit	DIY-12-HP-WMAH-115B DIY-12-HP-C-115B	DIY-18-HP-WMAH-230B DIY-18-HP-C-230B	DIY-24-HP-WMAH-230B DIY-24-HP-C-230B	DIY-36-HP-WMAH-230B DIY-36-HP-C-230B
CAPACITY & PERFORMANCE					
Cooling Capacity	Btu/h	12000	18000	23000	34500
SEER	Btu/w	22.0	20.0	20.0	16.0
Heating Capacity	Btu/h	12000	18000	25000	36000
HSPF		10	10	10	8.90
Indoor noise level (Hi/Mi/Lo)	dB(A)	38/31.5/23.5	45/37.5/31	47/42/33.5	52/45/35
ELECTRICAL PARTS					
Power supply	V ~ Hz.Ph	115~60,1	208-230~,60,1	208-230~,60,1	208-230~,60,1
Minimum Circuit (Disconnect)	A	15.0	15.0	18.0	25.0
Maximum Fuse (Breaker)	A	20.0	20.0	30.0	30.0
DIMENSIONS & WEIGHT					
Net Dimension	Indoor	inch	31.57 x 7.44 x 11.69	42.52x8.90 x 13.19	42.52 x 8.90 x 13.19	49.57 x 11.10 x 14.25
(WxDxH)	Outdoor	inch	31.50 x 13.11 x 21.81	33.27 x 14.29 x 27.64	37.24 x 16.14 x 31.89	37.24 x 16.14 x 31.89
Packing Dimension	Indoor	inch	37.60 x 17.52 x 14.17	49.02 x 19.49 x 15.75	49.02 x 19.49 x 15.75	56.69 x 21.26 x 18.50
(WxDxH)	Outdoor	inch	37.01 x 17.32 x 27.36	38.78 x 17.32 x 31.50	42.91 x 19.88 x 37.01	42.91 x 19.88 x 37.01
Net weight	Indoor	lbs	19.62	30.20	31.08	41.01
	Outdoor	lbs	78.70	98.77	127.65	150.35
Gross Weight	Indoor	lbs	37.70	54.01	54.67	70.99
	Outdoor	lbs	102.29	122.36	159.61	181.44
REFRIGERANT & PIPING					
Refrigerant R410A		oz	38.8	68.8	82.9	119.9
Piping Size Liquidside/Gasside		inch	1/4"-1/2"	1/4"-1/2"	3/8"-5/8"	3/8"-5/8"
NATIONAL AVERAGE ANNUAL OPERATING COSTS					
Cooling Cost*		$	72	119	152	284
Heating Cost*		$	254	381	529	855

ENERGY STAR

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

Notes :

1 YEAR COMPRESSOR WARRANTY

2 YEAR PARTS WARRANTY 2 YEAR GUARANTEED

Advantage

This system is meant to be installed by a HVAC technician. The newly designed 3rd generation Advantage Series, with improved efficiency ratings up to 19 SEER, delivers high performance comfort from the moment it's activated. The competitive price makes it a consumer favorite that's tough to beat.

JUST ASK amazon alexa

works with the Google Assistant

- Timer
- Leakage Detection
- Follow Me®
- Gold Fin® Condenser
- Smartphone App
- Low Ambient Cooling
- Quiet Running
- DC Inverter

SPECIFICATION

Model No.	Indoor Unit Outdoor Unit	A-09-HP-WMAH-230B A-09-HP-C-230B	A-12-HP-WMAH-230B A-12-HP-C-230B	A-18-HP-WMAH-230B A-18-HP-C-230B	A-24-HP-WMAH-230B A-24-HP-C-230B
CAPACITY & PERFORMANCE					
Cooling Capacity	Btu/h	9000	12000	18000	24000
SEER	Btu/w	18	19	19	17
Heating Capacity	Btu/h	9800	11800	18000	25000
HSPF		9.5	9.5	10	9.5
Indoor noise level (Hi/Mi/Lo)	dB(A)	36/-/23	40.5/-/25	45/-/29	45.5/-/33
ELECTRICAL PARTS					
Power supply	V~Hz,PH	208-230~60,1	208-230~60,1	208-230~60,1	208-230~60,1
Minimum Circuit Ampacity	A	15.0	15.0	15.0	18.0
Max.Fuse	A	15.0	15.0	20.0	25.0
DIMENSIONS & WEIGHT					
Net Dimension	Indoor	inch	28.43 x 7.36 x 11.42	31.57 x 7.44 x 11.69	37.99 x 8.46 x 12.56	42.52 x 8.90 x 13.19
(WxDxH)	Outdoor	inch	30.31 x 11.81 x 21.85	31.50 x 13.11 x 21.81	31.50 x 13.11 x 21.81	33.27 x 14.29 x 27.64
Packing Dimension	Indoor	inch	31.10 x 10.63 x 14.57	34.45 x 11.22 x 14.76	41.14 x 12.01 x 15.94	45.47 x 16.34 x 12.40
(WxDxH)	Outdoor	inch	35.43 x 13.58 x 23.03	36.22 x 15.35 x 24.21	36.22 x 15.35 x 24.21	38.00 x 15.55 x 30.12
Net weight	Indoor	lbs	17	18.96	24.03	30.2
	Outdoor	lbs	66.8	67	79.8	105.16
Gross Weight	Indoor	lbs	25	30	34	40
	Outdoor	lbs	77	81	102	133
REFRIGERANT & PIPING					
Refrigerant R410A		oz	R410A/28.2	R410A/33.9	R410A/52.9	R410A/63.5
Piping Size Liquidside/Gasside		inch	1/4"-3/8"	1/4"-1/2"	1/4"-1/2"	3/8"-5/8"
NATIONAL AVERAGE ANNUAL OPERATING COSTS					
Cooling Cost*		$	67	86	128	189
Heating Cost*		$	220	265	371	561

ENERGY STAR

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

Notes :

7 YEAR COMPRESSOR WARRANTY

5 YEAR PARTS WARRANTY 5 YEAR GUARANTEED

OLYMPUS
E Star™ Series

The MRCOOL® Olympus Energy Star Series ductless heat pump is the air comfort system you need to ensure your home stays comfortable, cool, and cost effective for as long as you desire. This high quality ductless heat pump is energy efficient, packed with great features, and priced to meet most household budgets and must be installed by a HVAC technician.

JUST ASK amazon alexa

works with the Google Assistant

- ✓ Leakage Detection
- ✓ DC Inverter
- ✓ Low Ambient Cooling
- ✓ Follow Me®
- ✓ Quiet Running
- ✓ Gold Fin® Condenser
- ✓ Smartphone App

SPECIFICATION

MODEL NO.	Indoor Unit Outdoor Unit	O-09-HP-WMAH-230A O-ES-09-HP-C-230	O-12-HP-WMAH-230A O-ES-12-HP-C-230	O-18-HP-WMAH-230A O-ES-18-HP-C-230	O-24-HP-WMAH-230A O-ES-24-HP-C-230
CAPACITY & PERFORMANCE					
Cooling Capacity	Btu/h	9000	12000	18000	24000
SEER	Btu/w	22.8	21.5	20.8	20.5
Heating Capacity	Btu/h	9800	12000	18000	25000
HSPF		10.5	9.8	10.0	10.0
Indoor noise level (Hi/Mi/Lo)	dB(A)	39/-/24.5	39/-/25	45.5/-/34.5	50/-/35.5
ELECTRICAL PARTS					
Power supply	V~Hz,Ph	208-230~60,1	208-230~60,1	208-230~60,1	208-230~60,1
Minimum Circuit Ampacity	A	15.0	15.0	15.0	15.0
Max.Fuse	A	15.0	15.0	20.0	25.0
DIMENSIONS & WEIGHT					
Net Dimension	Indoor	inch	32.87 x 7.80 x 11.02	32.87 x 7.80 x 11.02	38.98 x 8.58 x 12.40	46.69 x 10.16 x 13.39
(WxDxH)	Outdoor	inch	30.31 x 11.81 x 21.85	31.50 x 13.11 x 21.81	33.27 x 14.29 x 27.64	40.55 x 16.54 x 31.89
Packing Dimension	Indoor	inch	35.83 x 10.63 x 13.98	35.83 x 10.63 x 13.98	41.93 x 11.81 x 15.75	49.80 x 16.53 x 13.39
(WxDxH)	Outdoor	inch	35.43 x 13.58 x 23.03	36.22 x 15.35 x 24.21	38.00 x 15.55 x 29.72	42.91 x 19.69 x 34.06
Net weight	Indoor	lbs	19.84	19.84	26.89	40.12
	Outdoor	lbs	63.9	81.6	101.0	136.69
Gross Weight	Indoor	lbs	25.35	26.68	34.83	50.26
	Outdoor	lbs	69.4	88.2	108.2	147.27
REFRIGERANT & PIPING						
Refrigerant R410A		oz	R410A/38.8	R410A/40.6	R410A/68.8	R410A/82.9
Piping Size Liquidside/Gasside		inch	1/4"-3/8"	1/4"-1/2"	1/4"-1/2"	3/8"-5/8"
NATIONAL AVERAGE ANNUAL OPERATING COSTS						
Cooling Cost*		$	50	70	108	148
Heating Cost*		$	188	247	363	505

ENERGY STAR

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

Notes :

7 YEAR COMPRESSOR WARRANTY

5 YEAR PARTS WARRANTY
5 YEAR
GUARANTEED

OLYMPUS
Hyper Heat Series

The MRCOOL® Olympus Hyper Heat Series ductless mini-split heat pump is the air comfort system you need to ensure your home stays cost effective and comfortable all year. This system uses hyper-heat technology to ensure efficient and effective heating performance when outdoor temperatures become bitterly cold. This high quality ductless heat pump is energy efficient, packed with great features, and priced to meet most household budgets. It must be installed by HVAC Technician.

JUST ASK amazon alexa

works with the Google Assistant

- ✓ Smartphone App
- ✓ Leakage Detection
- ✓ Enhanced Heating
- ✓ Follow Me®
- ✓ Quiet Running
- ✓ Gold Fin® Condenser
- ✓ DC Inverter

ENERGY STAR

SPECIFICATION

Model No.	Indoor Unit Outdoor Unit	O-09-HP-WMAH-230A O-HH-09-HP-C-230	O-12-HP-WMAH-230A O-HH-12-HP-C-230	O-18-HP-WMAH-230A O-HH-18-HP-C-230	O-24-HP-WMAH-230A O-HH-24-HP-C-230
CAPACITY & PERFORMANCE					
Cooling Capacity	Btu/h	9000	12000	17000	24000
SEER	Btu/w	25.0	22.5	20.0	20.5
Heating Capacity	Btu/h	10900	11800	18000	24000
HSPF		11.2	12	10.3	11.5
Indoor noise level (Hi/Mi/Lo)	dB(A)	42/33/24.5	43/36/24	45.5/36/26.5	47.5 /44/36.5
ELECTRICAL PARTS					
Power supply	V~Hz,Ph	208-230~60,1	208-230~60,1	208-230~60,1	208-230~60,1
Minimum Circuit Ampacity	A	9.0	9.0	18.0	20.0
Max.Fuse	A	15.0	15.0	25.0	30.0
DIMENSIONS & WEIGHT					
Net Dimension	Indoor	inch	32.87 x 7.80 x 11.02	32.87 x 7.80 x 11.02	38.98 x 8.58 x 12.40	46.69 x 10.16 x 13.39
(WxDxH)	Outdoor	inch	31.50 x 13.11 x 21.81	31.50 x 13.11 x 21.81	33.27 x 14.29 x 27.64	37.24 x 16.54 x 31.89
Packing Dimension	Indoor	inch	35.83 x 10.63 x 13.98	35.83 x 10.63 x 13.98	41.93 x 11.81 x 15.75	49.80 x 16.53 x 13.39
(WxDxH)	Outdoor	inch	36.22 x 15.35 x 24.21	36.22 x 15.35 x 24.1	37.99 x 15.55 x 29.72	42.91 x 19.69 x 34.06
Net weight	Indoor	lbs	19.84	19.84	26.89	40.12
	Outdoor	lbs	88.2	88.2	107.4	135.58
Gross Weight	Indoor	lbs	25.35	26.68	34.83	50.26
	Outdoor	lbs	93.7	93.7	115.1	148.81
REFRIGERANT & PIPING					
Refrigerant R410A		oz	R410A/52.9	R410A/52.9	R410A/68.8	R410A/91.7
Piping Size Liquidside/Gasside		inch	1/4"-3/8"	1/4"-1/2"	1/4"-1/2"	3/8"-5/8"
NATIONAL AVERAGE ANNUAL OPERATING COSTS					
Cooling Cost*		$	45	67	107	148
Heating Cost*		$	196	198	353	421

ENERGY STAR

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

Notes :

7 YEAR COMPRESSOR WARRANTY

5 YEAR PARTS WARRANTY 5 YEAR GUARANTEED

OLYMPUS
Multi-Zone Series

The MRCOOL® Olympus is the whole house mini-split solution. Up to 5 zones, the Olympus offers aesthetically pleasing wall mounted and ceiling cassette units. This system is meant to be installed by a HVAC technician.

JUST ASK amazon alexa

works with the Google Assistant

- Smartphone App
- Multi-Zone Flexibility
- Follow Me®
- Versatile Installation
- Gold Fin® Condenser
- Superior Performance
- DC Inverter
- Energy Efficient

SPECIFICATION

HEAT PUMP CONDENSER - Outdoor Model		MULTI2-18HP230V1	MULTI3-27HP230V1	MULTI4-36HP230V1	MULTI5-48HP230V1
Max Number of Zones	UNIT	2	3	4	5
Power Supply	V/Hz/Ph	208-230/60/1	208-230/60/1	208-230/60/1	208-230/60/1
SEER	Btu/w	22.5	23	22.5	22.4
Minimum Circuit Ampacity	A	18	25	30	35
Max. Fuse	A	25	35	45	50
Net Dimensions (WxDxH)	in	33.27x14.29x27.64	37.24x16.14x31.89	37.24x16.14x31.89	37.48x16.34x52.48
Packaging Dimensions (WxDxH)	in	37.99x15.55x29.72	42.91x19.69x34.06	42.91x19.69x34.06	43.11x19.49x54.53
Net Weight	lbs	105.82	149.91	156.53	223.77
Outdoor Gross Weight	lbs	114.64	160.94	167.55	255.07

WALL MOUNTED - Indoor Model		O-09-HP-WMAH-230A	O-12-HP-WMAH-230A	O-18-HP-WMAH-230A	O-24-HP-WMAH-230A
Power Supply	V~Hz,Ph	208-230~60,1	208-230~60,1	208-230~60,1	208-230~60,1
Minimum Circuit Ampacity	A	9	9	18	20
Max. Fuse	A	15	15	25	30
Net Dimensions (WxDxH)	in	32.87x7.80x11.02	32.87x7.80x11.02	38.98x8.58x12.40	46.69x10.16x13.39
Packaging Dimensions (WxDxH)	in	35.83x10.63x13.98	35.83x10.63x13.98	41.93x11.81x15.75	49.80x16.53x13.39
Net Weight	lbs	19.8	19.8	26.9	40.1
Gross Weight	lbs	25.4	25.4	34.8	50.3
Piping Size Liquidside/Gasside	in	1/4"-3/8"	1/4"-1/2"	1/4"-1/2"	3/8"-5/8"

CEILING CASSETTE - Indoor Model		CASSETTE12HP-230	CASSETTE18HP-230	CASSETTE24HP-230	
Power Supply	V/Hz/Ph	208-230/60/1	208-230/60/1	208-230/60/1	
Minimum Circuit Ampacity	A	1.3	1.9	10.3	
Max. Fuse	A	15	15	17.5	
Net Dimensions (WxDxH)	in	22.44x22.44x10.24	22.44x22.44x10.24	33.07x33.07x8.07	
Packaging Dimensions (WxDxH)	in	25.79x25.79x11.42	25.79x25.79x11.42	35.43x35.43x8.54	
Net Weight	lbs	35.27	39.68	45.19	
Gross Weight	lbs	41.88	46.3	52.91	
Piping Size Liquidside/Gasside	in	1/4"-1/2"	1/4"-1/2"	3/8"-5/8"	

CEILING RECESSED - Indoor Model		DUCT-09HP-230	DUCT-12HP-230	DUCT-18HP-230	DUCT-24HP-230
Power Supply	V/Hz/Ph	208-230/60/1	208-230/60/1	208-230/60/1	208-230/60/1
Minimum Circuit Ampacity	A	1.2	1.3	1.9	2.5
Max. Fuse	A	15	15	15	15
Net Dimensions (WxDxH)	in	27.56x25x8.27	27.56x25x8.27	36.22x25x8.27	36.22x25x10.63
Packaging Dimensions (WxDxH)	in	36.02x25.79x11.42	36.02x25.79x11.42	44.68x25.79x11.42	44.68x25.79x13.78
Net Weight	lbs	39.9	39.9	50.7	57.32
Gross Weight	lbs	50.27	50.27	63.93	68.34
Piping Size Liquidside/Gasside	in	1/4"-3/8"	1/4"-1/2"	1/4"-1/2"	3/8"-5/8"

ENERGY STAR

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

MRCOOL SIGNATURE SERIES

10 YEAR PARTS WARRANTY ★ 10 YEAR ★ GUARANTEED

Package Heat Pump

A MRCOOL® packaged heat pump combines high performance cooling and powerful heating in one convenient, easy-to-install system. These units are competitively priced and operate at 14 SEER efficiency. A MRCOOL® packaged heat pump will be a great solution for tough air comfort problems in a suburban home, commercial office space, condominium, seaside villa, or wherever you desire.

MADE IN USA

- ✓ Easy Installation & Service
- ✓ Superior Performance
- ✓ Durable Build & Finish
- ✓ R410A Refrigerant
- ✓ Antimicrobial Drain Pan
- ✓ Louvered Coil Guard
- ✓ Optional Electric Heat
- ✓ Compact Design

‡Warranty provides for a total of 10 years of limited warranty coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty; 15-year for heat exchanger where specified). Warranty must be registered online within 60 days of installation to qualify for extended coverage. Unregistered equipment defaults to 5-year coverage.

SPECIFICATION

Model No.		UNIT	MPH241M414At	MPH301M414A	MPH361M414A	MPH421M414A	MPH481M414A	MPH601M414A
Power supply		Ph-V-Hz	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60
Cooling	Capacity	Btu/h	22600	28600	34000	40000	46000	57000
	SEER	Btu/w	14	14	14	14	14	14
Heating	Capacity	Btu/h	22000	27000	32400	39000	45000	56000
	HSPF4	Btu/w	8	8	8	8	8	8
Outdoor unit	Dimension (WxDxH)	inch	46.8 x 46.77 x 36.82	46.8 x 46.77 x 36.82	46.8 x 46.77 x 36.82	46.8 x 55.27 x 40.88	46.8 x 55.27 x 40.88	46.8 x 55.27 x 40.88
Sound rating		dB(A)	78	78	76	78	79	78
Weight		(lbs)	315	324	340	433	438	460
Refrigerant type		Type	R410A	R410A	R410A	R410A	R410A	R410A
Refrigerant charge		(lb-oz)	91	96	90	173	173	161

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

MRCOOL SIGNATURE SERIES

10 YEAR PARTS WARRANTY ★ 10 YEAR ★ GUARANTEED

Package Air Conditioner

This 2 ton, 208-230 volt, R410-A refrigerant, MRCOOL® packaged air conditioner unit has a seasonal energy efficiency rating of 14 SEER, providing maximum comfort cooling. This unit provides cooling only (this is NOT a heat pump).

MADE IN USA

- ✓ Easy Installation & Service
- ✓ Superior Performance
- ✓ Durable Build & Finish
- ✓ R410A Refrigerant
- ✓ Antimicrobial Drain Pan
- ✓ Louvered Coil Guard
- ✓ System Protection
- ✓ Compact Design

‡Warranty provides for a total of 10 years of limited warranty coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty; 15-year for heat exchanger where specified). Warranty must be registered online within 60 days of installation to qualify for extended coverage. Unregistered equipment defaults to 5-year coverage.

SPECIFICATION

Model No.		UNIT	MPC241M414A	MPC301M414A	MPC361M414A	MPC421M414A	MPC481M414A	MPC601M414A
Power supply		Ph-V-Hz	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60
Cooling	Capacity	Btu/h	22600	28400	34000	40000	45500	57000
	SEER	Btu/w	14	14	14	14	14	14
Motor	Condenser	HP	1/6	1/6	1/6	1/4	1/4	1/4
	Blower	HP	1/3	1/2	1/2	3/4	3/4	1
Outdoor unit	Dimension (WxDxH)	inch	46.8x46.77x36.82	46.8x46.77x36.82	46.8x46.77x36.82	46.8x55.27x40.88	46.8x55.27x40.88	46.8x55.27x40.88
Sound rating		dB(A)	77	79	78	78	77	78
Weight		(lbs)	308	319	332	405	411	445
Refrigerant type		Type	R410A	R410A	R410A	R410A	R410A	R410A
Refrigerant charge		(lb-oz)	72	80	87	108	115	125

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

MRCOOL® SIGNATURE SERIES

20 YEAR HEAT EXCHANGER WARRANTY

10 YEAR PARTS WARRANTY 10 YEAR GUARANTEED

Package Gas Electric

The MRCOOL® Gas and Electric Packaged Unit combines a high performance 14 SEER air conditioner with a powerful gas furnace to deliver the best air comfort possible in all weather conditions. Like all MRCOOL® products, this hybrid system is competitively priced, suitable for residential or commercial installation, and will run smoothly for years to come.

MADE IN USA

- ✓ Easy Installation & Service
- ✓ Quiet Running
- ✓ Durable Build & Finish
- ✓ R410A Refrigerant
- ✓ Optional LP Kit
- ✓ Multi-Position Application
- ✓ 81% AFUE
- ✓ Compact Design

‡ Warranty provides for a total of 10 years of limited warranty coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty; 15-year for heat exchanger where specified). Warranty must be registered online within 60 days of installation to qualify for extended coverage. Unregistered equipment defaults to 5-year coverage

SPECIFICATION

MODEL NO.		UNIT	MPG24S054M414A	MPG30S054M414A	MPG36S090M414A	MPG42S090M414A	MPG48S108M414A	MPG60S108M414A
Power supply		Ph-V-Hz	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60 1	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60
Cooling	Capacity	Btu/h	22600	28400	34000	40000	45500	57000
	SEER	Btu/h	14	14	14	14	14	14
	EER	Btu/h	11	11	11	11	11	11
Heating	Input	Btu/h	54000	54000	90000	90000	108000	108000
	Output	Btu/h	43800	43800	72900	72900	87500	87500
	Temp. Rise Range	°F	30-60	30-60	40-70	40-70	40-70	40-70
	AFUE	%	81	81	81	81	81	81
Outdoor unit	Dimension (WxDxH)	inch	46.8 x 46.77 x 36.82	46.8 x 46.77 x 36.82	46.8 x 46.77 x 36.82	46.8 x 55.27 x 40.88	46.8 x 55.27 x 40.88	46.8 x 55.27 x 40.88
	Weight	lbs	347	358	388	463	475	507
Refrigerant charge		(lb-oz)	72	80	87	108	115	125
Refrigerant type		Type	R410A	R410A	R410A	R410A	R410A	R410A
Sound rating		dB(A)	77	79	78	78	77	78

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

Notes :

MRCOOL®
SIGNATURE SERIES

10 YEAR PARTS WARRANTY
10 YEAR
GUARANTEED

Up to 16 SEER Air Conditioner Condenser

This 1.5 ton, 208-230 volt, R410A refrigerant, outdoor condenser has a seasonal energy efficiency rating of up to 16 SEER when paired with other MRCOOL® products. It provides maximum comfort cooling and high energy efficiency. This unit provides cooling only (this is NOT a heat pump).

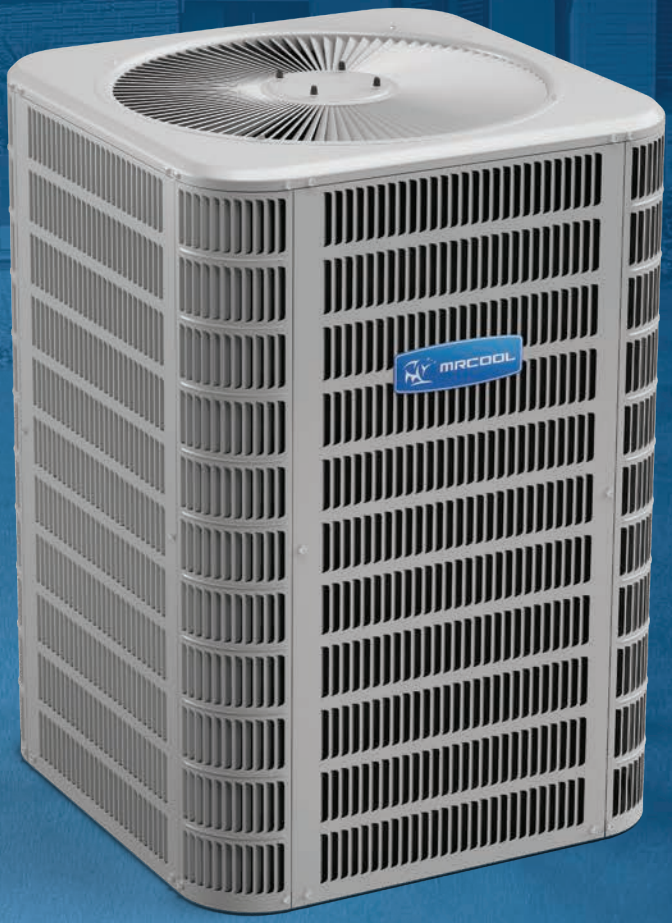

MADE IN USA

- Easy Installation & Service
- Superior Performance
- Durable Build & Finish
- R410A Refrigerant
- Antimicrobial Drain Pan
- CoolGuard™ Corrosion Resistant Coil
- Energy Efficient
- Compact Design

‡Warranty provides for a total of 10 years of limited warranty coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty; 15-year for heat exchanger where specified). Warranty must be registered online within 60 days of installation to qualify for extended coverage. Unregistered equipment defaults to 5-year coverage.

SPECIFICATION

MODEL NO.		UNIT	MAC16018A	MAC16024A	MAC16030A	MAC16036A	MAC16042A	MAC16048A	MAC16060A
Power Supply		Ph-V-Hz	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60
Cooling	Capacity	Btu/h	18000	23000-24000	26000-28000	33000-34000	40000-41000	46500-47500	57000-58000
	SEER	Btu/W*h	14-16	14-16	14-16	14-16	14-16	14-16	14-15
Heating	Capacity	Btu/h	-	-	-	-	-	-	-
	HSPF	Btu/W*h	-	-	-	-	-	-	-
Elect.	Min. Circuit	A	11.9	14.6	17.0	18	23.4	24.2	29.6
Data	Max. Amps	A	20	25	25	30	40	40	50
Compressor	Rated Load	A	9	10.9	12.8	13.6	17.9	18	22.2
	Locked Rotor	A	48	59	68	79	112	117	128
Outdoor fan	Rated Load	A	0.7	1.0	1.0	1.0	1.0	1.7	1.8
motor	Rated HP	HP	1/10	1/6	1/6	1/6	1/6	1/4	1/3
	Nom. RPM	RPM	1075	825	825	825	825	825	825
Refrigerant Charge		(lb-oz)	73	73	88	113	140	156	192
Outdoor air flow		CFM	600-650	730-850	945-1045	1110-1275	1340-1460	1500-1600	1780-1800
Out door unit	Dimension (WxHxD)	inch	24.25 x 29 x 24.25	28.25 x 37 x 28.25	28.25 x 37 x 28.25	28.25 x 37 x 28.25	28.25 x 37 x 28.25	28.25 x 37 x 28.25	32.25 x 43 x 32.25
	Packing (WxHxD)	inch	27 x 29.5 x 26.5	31 x 29.5 x 30.5	31 x 37.5 x 30.5	31 x 29.5 x 30.5	31 x 37.5 x 30.5	31 x 37.5 x 30.5	35 x 43.5 x 34.5
	Weight	lbs	134	152	169	181	211	218	226
Connection Liq. / Suct.		inch	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"- 7/8"**
Line Size Liq. / Suct.		inch	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-1 1/8"

** Adapter with unit.

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

Notes :

MRCOOL® SIGNATURE SERIES

10 YEAR PARTS WARRANTY ★ 10 YEAR ★ GUARANTEED

Up to 15 SEER / 8.5 HSPF Heat Pump Condenser

The MRCOOL® 15 SEER Heat Pump Split System works diligently to make your home a comfortable space. This product gives you total energy efficiency with its enhanced tube-and-fin coil design, allowing you to get more bang for your buck. You can have peace of mind with this product due to its affordability, quality, efficiency, and comfort.

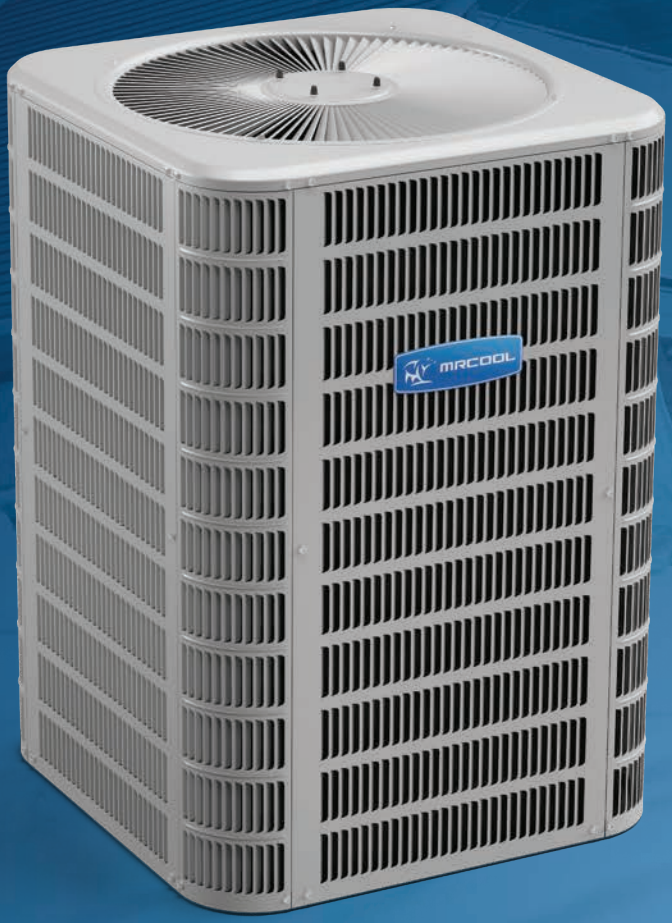

- ✓ Easy Installation & Service
- ✓ Energy Efficient
- ✓ Durable Build & Finish
- ✓ R410A Refrigerant
- ✓ Optional Electric Heat
- ✓ CoolGuard™ Corrosion Resistant Coil
- ✓ Compact Design
- ✓ Superior Performance

‡Warranty provides for a total of 10 years of limited warranty coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty; 15-year for heat exchanger where specified). Warranty must be registered online within 60 days of installation to qualify for extended coverage. Unregistered equipment defaults to 5-year coverage.

SPECIFICATION

MODEL NO.		UNIT	MHP15018A	MHP15024A	MHP15030A	MHP15036A	MHP15042A	MHP15048A	MHP15060A
Power Supply		V,Hz,Ph	208-230,60,1	208-230,60,1	208-230,60,1	208-230,60,1	208-230,60,1	208-230,60,1	208-230,60,1
Cooling	Capacity	Btu/h	18000	23400-24000	28000-28600	34000	41000	47000	57000
	SEER	Btu/W*h	14-16	14-15	14-15	14-15	14-15	14-15	14-15
Heating	Capacity	Btu/h	17000	21000-21600	25400-26000	33800	40000	45500-46000	55000
	HSPF	Btu/W*h	8.2	8.2-8.5	8.2-8.5	8.2-8.5	8.2-8.5	8.2-8.5	8.2-8.5
Elect. Data	Min. Circuit	A	12.2	17.9	17.1	18.7	24.2	29	29.4
	Max. Amps	A	20	30	25	30	45	45	50
Compressor	Rated Load	A	9.0	13.5	12.8	14.1	18.0	21.8	22.1
Outdoor	Locked Rotor	A	48	58	64	77	112	117	125
fan motor	Rated Load	A	1.0	1.1	1.1	1.1	1.8	1.8	1.8
	Rated HP	HP	1/6	1/6	1/6	1/6	1/3	1/3	1/3
	Nom. RPM	RPM	825	825	825	825	825	825	825
Refrigerant Charge		(lb-oz)	5.8125-93	5.875-94	5.625-90	9.375-150	11.5-184	10.0625-161	12.3125-197
Outdoor air flow		CFM	650	850-875	950-1070	1200-1275	1400-1450	1550-1600	1900-1930
	Dimension	inch	28.25 x 37 x 28.25	28.25 x 37 x 28.25	28.25 x 37 x 28.25	28.25 x 33 x 28.25	32.25 x 37 x 32.25	32.25 x 37 x 32.25	32.25 x 43 x 32.25
	(WxHxD)	inch							
Out door unit	Packing	lbs	31 x 37.5 x 30.5	31 x 37.5 x 30.5	31 x 37.5 x 30.5	31 x 33.5 x 30.5	35 x 37.5 x 34.5	35 x 37.5 x 34.5	35 x 43.5 x 34.5
	(WxHxD)	inch							
	Weight	inch	175	177	178	202	272	273	297
Connection Liq. / Suct.			3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"
Line Size Liq. / Suct.			3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-1 1/8"

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

Notes :

MRCOOL® SIGNATURE SERIES

10 YEAR PARTS WARRANTY ★ 10 YEAR ★ GUARANTEED

Multi-Position Air Handler

for MAC*16A and MHP*A Condensers

Air Handler with TXV

The MRCOOL® Multi-Position Air Handler is designed to deliver dependable comfort and is built for reliability. The electronically commutated motor (ECM) delivers consistent airflow throughout the seasons, allowing you to remain relaxed at all times. When choosing a MRCOOL® Multi-Position Air Handler, you can always know that you are being energy and time efficient.

- ✓ Mobile Home Approved
- ✓ Superior Performance
- ✓ Durable Build & Finish
- ✓ R410A Refrigerant
- ✓ Multi-Position Application
- ✓ CoolGuard™ Corrosion Resistant Coil
- ✓ Energy Efficient
- ✓ Compact Design

‡Warranty provides for a total of 10 years of limited warranty coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty; 15-year for heat exchanger where specified). Warranty must be registered online within 60 days of installation to qualify for extended coverage. Unregistered equipment defaults to 5-year coverage.

SPECIFICATION

MODEL NO.		UNIT	MAHM018CTA	MAHM024CTA	MAHM030CTA	MAHM036CTA	MAHM042CTA	MAHM048CTA	MAHM060CTA
Power Supply		Ph-V-Hz	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1-208/230 - 60	1 - 208/230 - 60
Blower Motor	Type		PSC	PSC	PSC	PSC	PSC	PSC	PSC
	Rated HP	HP	1/5	1/3	1/2	1/3	1/2	1	1
	Size	inch	9x6	9x6	10x8	10x8	10x8	12x10	12x10
Filter Size		inch	15x20	15x20	15x20	18x20	18x20	18x20	18x20
Max. Elec. Heat Available		kW	7.5	10	15	15	15	20	20
Indoor unit	Dimension (WxHxD)	inch	18.5x43.5x16.5	18.5x45.5x16.5	18.5x47x16.5	21.25 x 53.63 x 19.5	21.5 x 53.63 x19.5	21.5x55x19.5	21.5 x 59.75 x19.5
	Packing (WxHxD)	inch	27x47x22.8	27x49x22.8	27x50.5x22.8	27x57.5x25.5	27x57.5x25.5	27x58.5x25.5	27x63.3x25.5
	Weight	lbs	109	127	133	163	168	186	186
Connection Liq. / Suct.		inch	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"

MODEL		UNIT	MAHM024ETA	MAHM030ETA	MAHM036ETA	MAHM042ETA	MAHM048ETA	MAHM060ETA	
Power Supply		Ph-V-Hz	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	
Blower	Type		ECM	ECM	ECM	ECM	ECM	ECM	
Motor	Rated HP	HP	1/2	1/2	1/2	3/4	1	1	
	Size	inch	10 x 8	10 x 8	10 x 8	12 x 10	12 x 10	12 x 10	
Filter Size		inch	15x20	15x20	18x20	18x20	18x20	18x20	
Max. Elec. Heat Available		kW	10	15	15	15	20	20	
Indoor unit	Dimension (WxHxD)	inch	18.5x45.5x16.5	18.5x47x16.5	21.5x53.63x19.5	21.5x53.63x19.5	21.5x55x19.5	21.5x59.75x19.5	
	Packing (WxHxD)	inch	27 x 49 x 22.8	27 x 50.5 x 22.8	27 x 57.5 x 25.5	27 x 57.5 x 25.5	27 x 58.5 x 25.5	27 x 63.3 x 25.5	
	Weight	lbs	127	133	163	168	186	186	
Connection Liq. / Suct.		inch	3/8"-3/4"	3/8"-3/4"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

Notes :

MRCOOL® SIGNATURE SERIES

10 YEAR PARTS WARRANTY ★ 10 YEAR ★ GUARANTEED

R410A & R22 Multi-Position Cased Evaporator Coils

Our efficient and durable Cased Evaporator Coils provide the best solution for heat pumps and air conditioners for fast, flexible application. This Signature Series coil, when appropriately paired with a MRCOOL® Signature Series condenser and gas furnace or modular blower, can achieve efficiency ratings of up to 16 SEER.

MADE IN USA

- ✓ Flexible Installation
- ✓ Superior Performance
- ✓ Durable Build & Finish
- ✓ R410A & R22 Compatible
- ✓ Multi-Position Application
- ✓ CoolGuard™ Corrosion Resistant Coil
- ✓ Energy Efficient
- ✓ Compact Design

‡Warranty provides for a total of 10 years of limited warranty coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty; 15-year for heat exchanger where specified). Warranty must be registered online within 60 days of installation to qualify for extended coverage. Unregistered equipment defaults to 5-year coverage.

SPECIFICATION

MODEL NO.	UNIT	MCDP0018ANPA	MCDP0024ANPA	MCDP0024BNPA	MCDP3036ANPA	MCDP3036BNPA	MCDP3036CNPA	MCDP0048BNPA	MCDP0048CNPA
Capacity	Btu/h	18000	24000	24000	36000	36000	36000	48000	48000
Indoor Dimension unit (D*H*W)	inch	14 1/8 x14.5 x 26 1/8	14 1/8 x14.5 x 26 1/8	14 1/8 x17.5 x 26 1/8	16 1/8 x14.5 x 26 1/8	16 1/8 x17.5 x 26 1/8	16 1/8 x 21 x 26 1/8	20 x 17.5 x 26 1/8	20 x 21 x 26 1/8
Refrigerant Type		R410A							
Liquid side/ Suction side	inch	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"

MODEL NO.	UNIT	MCDP5060CNPA	MCDP0060DNPA	MCHP24ANPA	MCHP24BNPA	MCHP30ANPA	MCHP30BNPA	MCHP36CNPA	MCHP48BNPA
Capacity	Btu/h	60000	60000	24000	24000	30000	30000	36000	48000
Indoor Dimension unit (W*H*D)	inch	23 5/8 x 21 x 26 1/8	23 5/8 x 24.5 x 26 1/8	21.5 x14.5 x 26.5	21.5 x17.5 x 26.5	21.5 x14.5 x 26.5	21.5 x17.5 x 26.5	21.5 x 21 x 26.5	21.5 x17.5 x 31.5
Refrigerant Type		R410A							
Liquid side/ Suction side	inch	3/8"-7/8"	3/8"-7/8"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-7/8"

MODEL NO.	UNIT	MCHP48CNPA	MCHP51CNPA	MCHP60DNPA	MCVP0024ANPA	MCVP0024BNPA	MCVP0030ANPA	MCVP0030BNPA	MCVP0036BNPA
Capacity	Btu/h	48000	51000	60000	24000	24000	30000	30000	36000
Indoor Dimension unit (W*H*D)	inch	21.5 x 21 x 26.5	21.5 x 21 x 31.5	21.5 x 24.5 x 31.5	14.5 X 18.5 x 21	17.5 X 18.5 x 21	14.5 X 22.5 x 21	17.5 X 22.5 x 21	17.5 X 22.5 x 21
Refrigerant Type		R410A							
Liquid side/ Suction side	inch	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"	3/8"-3/4"

MODEL NO.	UNIT	MCVP0048BNPA	MCVP0048CNPA	MCVP0049CNPA	MCVP0060CNPA				
Capacity	Btu/h	48000	48000	49000	60000				
Indoor Dimension unit (W*H*D)	inch	17.5 X 27.5 x 21	21 X 27.5 x 21	21 x 29.5 x 22	21 x 31.5 x 21				
Refrigerant Type		R410A							
Liquid side/ Suction side	inch	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"	3/8"-7/8"				

AHRI CERTIFIED® www.ahridirectory.org

Notes :

MRCOOL SIGNATURE SERIES

20 YEAR HEAT EXCHANGER WARRANTY

10 YEAR PARTS WARRANTY 10 YEAR GUARANTEED

80% AFUE

Gas Furnace

When harsh winter weather strikes, nothing compares to the warmth and safety a powerful, reliable gas furnace can provide. One of the best on the market is the MRCOOL® single stage, 80% AFUE gas furnace.

- ✓ Quiet Running
- ✓ Superior Performance
- ✓ Durable Build & Finish
- ✓ Optional LP Kit
- ✓ Multi-Position Application
- ✓ 80% AFUE
- ✓ Energy Efficient
- ✓ Compact Design

‡Warranty provides for a total of 10 years of limited warranty coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty; 15-year for heat exchanger where specified). Warranty must be registered online within 60 days of installation to qualify for extended coverage. Unregistered equipment defaults to 5-year coverage.

SPECIFICATION

UPFLOW / HORIZONTAL MODEL NO.	UNIT	MGM80SE045A3A	MGM80SE070B3A	MGM80SE090B4A	MGM80SE090C5A	MGM80SE110C5A	MGM80SE135D5A	
Power Supply	Ph-V-Hz	1 - 120 - 60	1 - 120 - 60	1 - 120 - 60	1 - 120 - 60	1 - 120 - 60	1 - 120 - 60	
Natural	Btu/h	44,000	66,000	88,000	88,000	110,000	132,000	
Gas	Btu/h	35,200	52,800	70,400	70,400	88,000	105,600	
Blower Size	inch	10 x 8	10 x 10	10 x 10	11.5 x 10	11.5 x 10	11 x 11	
Temp Rise Range	° F	15-45	40-70	35-65	30-60	35-65	30-60	
Cabinet Size (W)	inch	14.5	17.5	17.5	21	21	24.5	
Cabinet (DxH)	inch	28.625x33	28.625x33	28.625x33	28.625x33	28.625x33	28.625x33	
Motor	HP	1/2	1/2	3/4	1	1	1	
Air Flow Rate (0.5ESP)	CFM	1230	1245	1615	2060	2025	2240	
Motor Speeds		5 speed	5 speed	5 speed	5 speed	5 speed	5 speed	
Gas Type		NG (LP w/ kit)	NG (LP w/ kit)	NG (LP w/ kit)	NG (LP w/ kit)	NG (LP w/ kit)	NG (LP w/ kit)	
Gas Connection Size	inch	1/2	1/2	1/2	1/2	1/2	1/2	
Gross Weight	lbs	111	127	142	152	160	178	

DOWNFLOW	MODEL NO.	UNIT	MGD80SE045A3A	MGD80SE070B3A	MGD80SE090B4A	MGD80SE110C5A
Power Supply		Ph-V-Hz	1 - 120 - 60	1 - 120 - 60	1 - 120 - 60	1 - 120 - 60
Natural	Input	Btu/h	44,000	66,000	88,000	110,000
Gas	Output	Btu/h	35,200	52,800	70400	88,000
Blower Size		inch	10 x 8	10 x 10	10 x 10	11.5 x 10
Temp Rise Range		° F	15-45	30-60	30-60	30-60
Cabinet Size (W)		inch	14.5	17.5	17.5	21
Cabinet (DxH)		inch	28.625x33	28.625x33	28.625x33	28.625x33
Motor		HP	1/2	1/2	3/4	1
Air Flow Rate (0.5ESP)		CFM	1275	1280	1570	2165
Motor Speeds			5 speed	5 speed	5 speed	5 speed
Gas Type			NG (LP w/optional kit)	NG (LP w/optional kit)	NG (LP w/optional kit)	NG (LP w/optional kit)
Gas Connection Size		inch	1/2	1/2	1/2	1/2
Gross Weight		lbs	113	128	140	160

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

Notes :

MRCOOL SIGNATURE SERIES

20 YEAR HEAT EXCHANGER WARRANTY

10 YEAR PARTS WARRANTY 10 YEAR GUARANTEED

Up to 84% AFUE

Oil Furnace

Oil burns hotter than natural gas, delivering more heat per BTU compared to other heating sources. Heating furnaces that use oil cost 10% – 25% less than the ones that use natural gas.

MADE IN USA

- ✓ Advanced Burner Control
- ✓ Quiet Running
- ✓ Heavy-Duty Steel
- ✓ 10kV Solid State Ignition
- ✓ Ceramic Fiber Chamber
- ✓ Up to 84% AFUE
- ✓ 5 Flue / Flow Configurations
- ✓ 4 Speed PSC Motor

‡ Warranty provides for a total of 10 years of limited warranty coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty; 15-year for heat exchanger where specified). Warranty must be registered online within 60 days of installation to qualify for extended coverage. Unregistered equipment defaults to 5-year coverage.

SPECIFICATION UPFLOW

MODEL NO.		UNIT	MOUF83SC057-072E12A	MOUF83SC084-095E16A	MOUF83SC112-125F20A	MOHF83SC084-095E12A	MOHF83SC112-125F20A	MOHR83SC084-095E12A
Power Supply		Ph-V-Hz	1 - 120 - 60	1 - 120 - 60	1 - 120 - 60	1 - 120 - 60	1 - 120 - 60	1 - 120 - 60
Fuel	Input	Btu/h	67,500 - 85,500	101,000 - 113,500	135,00 - 151,000	101,000 - 113,500	135,00 - 151,000	101,000 - 113,500
Oil	Output	Btu/h	57,000 - 72,000	84,000 - 95,000	113,00 - 126,000	85,000 - 95,000	113,00 - 126,000	85,000 - 95,000
Blower Size		inch	10 x 8	10 x 10	12 x 11	10 x 10	12 x 9	10 x 10
Temp Rise Range		° F	50-80	50-80	45-75	45-75	45-75	45-75
Cabinet Size (W)		inch	19.5	19.5	22.5	59	59	59
Cabinet (DxH)		inch	30.625 x 54	30.625 x 54	33.125 x 54	20.5 x 37	23.5 x 37	20.5 x 37
Motor		HP	1/3	1/3	1/2	1/2	3/4	3/4
Air Flow Rate (0.5ESP)		CFM	1220	1590	1835	1195	2005	1210
Motor Speeds		--	4 speed	4 speed	4 speed	4 speed	4 speed	4 speed
Gross Weight		lbs	230	250	270	250	270	250

SPECIFICATION BASEMENT

MODEL NO.		UNIT	MOBF83SC084-095E16A	MOBF83SC112-125F20A	MOBR83SC084-095E16A	MOBR83SC112- 125F20A
Power Supply		Ph-V-Hz	1 - 120 - 60	1 - 120 - 60	1 - 120 - 60	1 - 120 - 60
Fuel	Input	Btu/h	101,000 - 113,500	135,00 - 151,000	101,000 - 113,500	135,00 - 151,000
Oil	Output	Btu/h	85,000 - 95,000	113,00 - 126,000	85,000 - 95,000	113,00 - 126,000
Blower Size		inch	10 x 9	12 x 10	10 x 9	12 x 10
Temp Rise Range		° F	45 - 75	45 - 75	45 - 75	45 - 75
Cabinet Size (W)		inch	19.5	22.5	19.5	22.5
Cabinet (DxH)		inch	37 x 54	37 x 54	37 x 54	37 x 54
Motor		HP	1/3	1/3	1/2	3/4
Air Flow Rate (0.5ESP)		CFM	1550	2130	1550	2130
Motor Speeds		--	4 low, med, med/high, high	4 low, med, med/high, high	4 low, med, med/high, high	4 low, med, med/high, high
Gross Weight		lbs	225	270	230	270

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

Notes :

MRCOOL SIGNATURE SERIES

20 YEAR HEAT EXCHANGER WARRANTY

10 YEAR PARTS WARRANTY GUARANTEED 10 YEAR

95% AFUE

Gas Furnace

The 95% AFUE multi-positional gas furnace by MRCOOL® is a powerful, high quality, and energy efficient heater. Unlike a lot of other furnace models, the MRCOOL® 95% AFUE furnace wastes a minimal amount of fuel ensuring most of your dollar is spent wisely rather than wasted.

- Quiet Running
- Superior Performance
- Durable Build & Finish
- Optional LP Kit
- Multi-Position Application
- 95% AFUE
- Energy Efficient
- Compact Design

‡Warranty provides for a total of 10 years of limited warranty coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty; 15-year for heat exchanger where specified). Warranty must be registered online within 60 days of installation to qualify for extended coverage. Unregistered equipment defaults to 5-year coverage.

SPECIFICATION

UPFLOW HORIZONTAL		UNIT	MGM95SE045B3XA	MGM95SE070B3XA	MGM95SE090C4XA	MGM95SE110C5XA	MGM95SE135D5XA
Power Supply		Ph-V-Hz	1 - 120 - 60	1 - 120 - 60	1 - 120 - 60	1 - 120 - 60	1 - 120 - 60
Natural	Input	Btu/h	44,000	66,000	88,000	110,000	132,000
Gas	Output	Btu/h	42,000	64,000	85,000	106,000	128,000
Blower Size		inch	10 x 8	10 x 8	10 x 10	11.5 x 10	11.5 x 10
Temp Rise Range		° F	35-65	35-65	40-70	45-75	50-80
Cabinet Size (W)		inch	17.5	17.5	21	21	24.5
Cabinet (DxH)		inch	28.5x33	28.5x33	28.5x33	28.5x33	28.5x33
Motor		HP	1/2	1/2	3/4	1	1
Air Flow Rate (0.5ESP)		CFM	1215	1215	1560	2030	2225
Motor Speeds		--	4 speed	4 speed	4 speed	4 speed	4 speed
Gas Type		--	NG (Natural Gas)	NG (Natural Gas)	NG (Natural Gas)	NG (Natural Gas)	NG (Natural Gas)
Gas Connection Size		inch	1/2	1/2	1/2	1/2	1/2
Gross Weight		lbs	129	134	158	170	187

SPECIFICATION

DOWNFLOW		UNIT	MGD95SE045B3XA	MGD95SE070B4XA	MGD95SE090C4XA	MGD95SE110C5XA
Power Supply		Ph-V-Hz	1 - 120 - 60	1 - 120 - 60	1 - 120 - 60	1 - 120 - 60
Natural	Input	Btu/h	44,000	66,000	88,000	110,000
Gas	Output	Btu/h	42,000	64,000	85,000	106,000
Blower Size		inch	10 x 8	11.5 x 10	10 x 10	11 x 11
Temp Rise Range		° F	25-55	25-55	40-70	40-70
Cabinet Size (W)		inch	17.5	17.5	21	21
Cabinet (DxH)		inch	28.5x33	28.5x33	28.5x33	28.5x33
Motor		HP	1/2	3/4	3/4	1
Air Flow Rate (0.5ESP)		CFM	1230	1585	1570	2060
Motor Speeds		--	4 low, med, med/high, high	4 low, med, med/high, high	4 low, med, med/high, high	4 low, med, med/high, high
Gas Type		--	NG (Natural Gas)	NG (Natural Gas)	NG (Natural Gas)	NG (Natural Gas)
Gas Connection Size		inch	1/2	1/2	1/2	1/2
Gross Weight		lbs	131	144	160	174

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

Notes :

MRCOOL SIGNATURE SERIES

10 YEAR PARTS WARRANTY 10 YEAR GUARANTEED

Electric Furnace

Modular Air System

The MRCOOL® Multi-Position Modular Blower is designed to deliver dependable comfort and is built for reliability. The electronically commutated motor (ECM) delivers consistent airflow throughout the seasons, allowing you to remain relaxed at all times.

MADE IN USA

- ✓ Mobile Home Approved
- ✓ Durable Build & Finish
- ✓ R410A Refrigerant
- ✓ Multi-Position Application
- ✓ Superior Performance
- ✓ Energy Efficient
- ✓ Compact Design

‡Warranty provides for a total of 10 years of limited warranty coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty; 15-year for heat exchanger where specified). Warranty must be registered online within 60 days of installation to qualify for extended coverage. Unregistered equipment defaults to 5-year coverage.

SPECIFICATION

MODEL NO.			UNIT	MMBV08BE	MMBV12BE	MMBV16CE	MMBV20DE
Power Supply			V,Hz,Ph	208-230,60,1	208-230,60,1	208-230,60,1	208-230,60,1
Blower	Type		--	ECM™ variable	ECM™ variable	ECM™ variable	ECM™ variable
Motor	Rated HP		HP	1/3	1/2	3/4	3/4
	Size		inch	9x6	9x6	10x8	10x8
Filter Size			inch	15x20	15x20	15x20	18x20
Max. Elect. Heat Available			kW	10	15	15	15
Indoor	Dimension		inch	17.5 x 25 x 21	17.5 x 25 x 21	21 x 26 x 21	21 x 26 x 24.5
Unit	Packing	(WxHxD)	inch	-	-	-	-
	Weight	(WxHxD)	lbs	79	86	97	105
CFM @ 0.5 ESP	Up to		W.C.	980	1210	1610	1780

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

Notes :

geocool®
Reliable energy-saving comfort.

10 YEAR COMPRESSOR WARRANTY

10 YEAR PARTS WARRANTY 10 YEAR GUARANTEED

Up to 35 EER Geothermal Heat Pump

The Geocool® eco-friendly series geothermal heat pump provides the homeowner with ultimate comfort and performance in one compact, easy to install unit. It uses chlorine-free and non-depleting R410A refrigerant that not only helps save money on energy bills, but also reduces air pollution.

+ complete install kits available

MADE IN USA

- ✓ Quiet Running
- ✓ 2 Stage Compressor
- ✓ Horizontal/Vertical
- ✓ Brushed Aluminum Cabinet
- ✓ Safeguards & Diagnostics
- ✓ Best in Class Efficiency
- ✓ Energy Efficient
- ✓ Compact Design

‡Warranty provides for a total of 10 years of limited warranty coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty; 15-year for heat exchanger where specified). Warranty must be registered online within 60 days of installation to qualify for extended coverage. Unregistered equipment defaults to 5-year coverage.

SPECIFICATION

VERTICAL UPFLOW	MODEL NO.	UNIT	GCHPV024TGTAN**	GCHPV036TGTAN**	GCHPV048TGTAN**	GCHPV060TGTAN**
Capacity		Btu/h	24000	36000	48000	57000
EER (Part Load)	Closed - Open (loop)	Btu/W*h	27.6 - 32.7	27.6 - 35.3	26.6 - 35	26.1 - 32.8
COP (Part Load)	Closed - Open (loop)	--	4.5 - 5.3	4.6 - 5.4	4.3 - 5.0	4.5 - 5.29
EER (Full Load)	Closed - Open (loop)	Btu/W*h	21.3 - 28.8	20.6 - 28.7	20.0 - 28.6	19.4 - 25.8
COP (Full Load)	Closed - Open (loop)	--	4.1 - 5.2	4.2 - 5.2	4.1 - 5.0	4.0 - 4.97
Compressor		--	Two-Stage	Two-Stage	Two-Stage	Two-Stage
Power supply		Ph-V-Hz	1 - 230 - 60	1 - 230 - 60	1 - 230 - 60	1 - 230 - 60
Dimension (WxDxH)	Net	inch	25.75 x 32 x 44	25.75 x 32 x 44	25.75 x 32 x 48	25.75 x 32 x 52

VERTICAL UPFLOW	MODEL NO.	UNIT	GCHPH024TGTAN**	GCHPH036TGTAN**	GCHPH048TGTAN**	GCHPH060TGTAN**
Capacity		Btu/h	24000	36000	48000	57000
EER (Part Load)	Closed - Open (loop)	Btu/W*h	27.9 - 32.7	30 - 35.4	28.5 - 33	26.1 - 32.8
COP (Part Load)	Closed - Open (loop)	--	4.5 - 5.3	4.6 - 5.4	4.3 - 5.0	4.5 - 5.29
EER (Full Load)	Closed - Open (loop)	Btu/W*h	21.3 - 28.8	20.6 - 28.7	20.0 - 28.6	19.4 - 25.8
COP (Full Load)	Closed - Open (loop)	--	4.1 - 5.2	4.2 - 5.2	4.1 - 5.0	4.0 - 4.97
Compressor		--	Two-Stage	Two-Stage	Two-Stage	Two-Stage
Power supply		Ph-V-Hz	1 - 230 - 60	1 - 230 - 60	1 - 230 - 60	1 - 230 - 60
Dimension (WxDxH)	Net	inch	25.75 x 44 x 32	25.75 x 44 x 32	25.75 x 48 x 32	25.75 x 52 x 32

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

Notes :

Up to 20 SEER
Universal Series Condenser

MRCOOL® would like to introduce you to the future of HVAC with its new Ultra-Heat Inverter Unitary Condensing Unit and Air Handler. This 2-3 Ton unit provides superb comfort while running at an extremely quiet dB, rapid cooling and heating, and maximum savings up to 20 SEER.

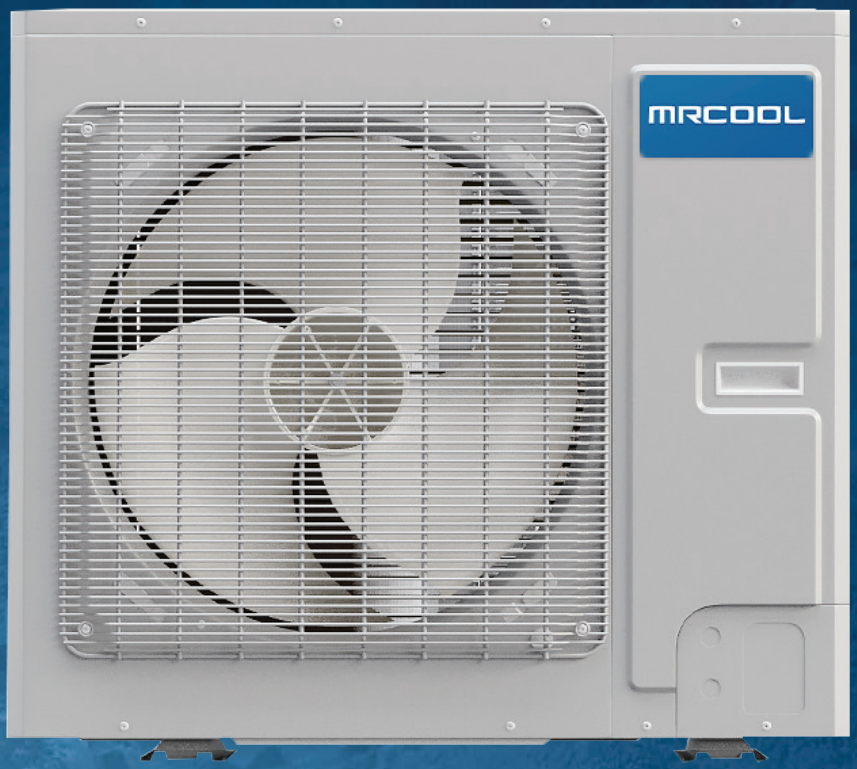

- 3 Ton Condenser Can Be Field Converted to 2 Ton using a Dip Switch Setting (see manual for details)
- Rapid Cooling and Heating
- Quiet 60dB(a) Operation
- 100% Heating Capacity Down to -4°F
- 100% Cooling Capacity Up to 115°F
- Low Ambient Cooling Down to 5°F
- Heats Without A Heat Kit Down to -22°F
- Gas Furnace Not Required
- Compatible with any Third Party Air Handler and Thermostat including WiFi/Nest
- Slim Design
- 3 Connection Types:
  - Pre-Charged No-Vac® Quick Connect® Line Set (15ft, 25ft, 35ft, 50ft-Couplings also available)
  - Sweat Braze Connection
  - Flare Connection

‡Warranty provides for a total of 10 years of limited warranty coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty; 15-year for heat exchanger where specified). Warranty must be registered online within 60 days of installation to qualify for extended coverage. Unregistered equipment defaults to 5-year coverage.

SPECIFICATION

MODEL			MDUO18024	MDUO18036
CAPACITY & PERFORMANCE		UNITS		
Cooling Capacity		Btu/h (kW)	24000 (7kW)	36000 (10.55kW)
SEER		Btu/w	Up to 20	Up to 18
Heating Capacity		Btu/h	24000 (7kW)	36000 (10.55kW)
EER		(Btu/h)/W	10	10
HSPF		Btu/w	10.91	10.91
Noise level - Air Handler		dB(A)	60	60
ELECTRICAL PARTS				
Min/Max Voltage		V	187/253	187/253
Rated Voltage		V	208/230	208/230
Min. Current Ampacity (MCA)		A	18	24
Max. Current Over Protection (MOP)		A	20	35
DIMENSIONS & WEIGHT				
Net Dimension	(WxDxH)	inch (mm)	37.0x18.1x32.3 (940x460x820)	37.0x18.1x32.3 (940x460x820)
Packing Dimension	(LxWxH)	inch (mm)	42.6x22.6x38.3 (1083x573x973)	42.6x22.6x38.3 (1083x573x973)
Net weight	Outdoor	lbs (kg)	217.2 (98.5)	217.2 (98.5)
Gross Weight	Outdoor	lbs (kg)	240.3(109)	240.3(109)
REFRIGERANT & PIPING				
Refrigerant Type			R-410	R-410
Connection Pipe Method			Quick Connect, Flare, Weld	Quick Connect, Flare, Weld
			(with Stub)	(with Stub)

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

Notes :

Universal Series
2-3 Ton Universal Air Handler

The Universal Series Air Handler provides superb comfort while running at an extremely quiet dB, rapid cooling and heating, and maximum savings.

- R410A Factory Pre-Charged Air Handler Can Be Field Converted from 3 Ton to 2 Ton using a Dip Switch Setting (see manual for details)
- Multi-Position Installation (Upflow, Horizontal)
- Internal Fan Blade Creates Low Noise
- 3 Connection Types:
  - Pre-charged No-Vac® Quick Connect® Line Set (15ft, 25ft, 35ft, 50ft-Couplings also available)
  - Sweat Braze Fitting
  - Flare Fitting
- The Special Fire-Proof Electrical Box Design Offers Anti-Electric Shock Reserved Installation Space for the Circuit Breaker
- Easy to Clean Metal Filter Protects Against Fire, Corrosion, and Deterioration
- 2 Step Condensation Protection
- 10 Year Limited Warranty*

‡Warranty provides for a total of 10 years of limited warranty coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty; 15-year for heat exchanger where specified). Warranty must be registered online within 60 days of installation to qualify for extended coverage. Unregistered equipment defaults to 5-year coverage.

SPECIFICATION

MODEL		MDUI18024	MDUI18036
	UNITS		
Cooling Capacity	Btu/h (kW)	24000 (7kW)	36000 (10.55kW)
SEER	Btu/w	Up to 20	Up to 18
Heating Capacity	Btu/h	24000 (7kW)	36000 (10.55kW)
EER	(Btu/h)/W	10.91	10.91
HSPF	Btu/w	10	10
Noise level - Air Handler	dB(A)	49	49
ELECTRICAL PARTS			
Min/Max Voltage	V	187/253	187/253
Rated Voltage	V	208/230	208/230
Min. Current Ampacity (MCA)	A	5	5
Max. Current Over Protection (MOP)	A	15	15
DIMENSIONS & WEIGHT			
Net Dimension (LxWxH)	inch (mm)	21.3x21.3x48.2(540x540x1224)	21.3x21.3x48.2(540x540x1224)
Packing Dimension (LxWxH)	inch (mm)	26.0x23.7x50.4(660x603x1280)	26.0x23.7x50.4(660x603x1280)
Net weight Indoor	lbs (kg)	156.5(71)	156.5(71)
Gross Weight Indoor	lbs (kg)	169.8(77)	169.8(77)
REFRIGERANT & PIPING			
Refrigerant Type		R-410A	R-410A
Connection Pipe Method		Quick Connect®, Flare, Weld	Quick Connect®, Flare, Weld
		(with Stub)	(with Stub)

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

Notes :

NO-VAC® QUICK CONNECT® FACTORY CHARGED LINE SET

This easy-to-use line set greatly simplifies the installation process. It is pre-charged from the factory for the precise amount of refrigerant necessary for the 2-3 ton MrCool® Universal heat pump split system. Which means that this line set requires no charging in the field and no vacuuming. It is 100% ready to go right out of the box.

- Kink Resistant for Easier Bending During Installation
- 100% Accurately Precharged R410A Refrigerant

15 FT	25 FT	35 FT	50 FT
1.94 OZ	3.17 OZ	9.77 OZ	19.44 OZ

- Simple to Use Screw-on Quick Connect Valves
- Line sizes 3/4” and 3/8”
- Leak Proof
- No Vacuum Needed
- Quicker Installation than Conventional Linesets By Saving 7 Installation Steps
- Strong 3/4” Gator-Flextra™ UV Protective Insulation Sleeve Provides Extra Protection Against Sun Damage, Weather Erosion, or Destruction from Animals/rodents

Smart HVAC Ductless Ministat

On-device local controls to completely manage full range of mini split air conditioner actions including modes, swing positions, fan speeds and more. Ideal for homes, hotels, vacation rentals, airbnb properties, and more.

- ✓ Global Control
- ✓ Temperature Range Control
- ✓ Auto Remote Detection
- ✓ Daily/Weekly Scheduling
- ✓ Timeline of Actions
- ✓ Temperature Calibration
- ✓ Local Controls
- ✓ Location Based Control
- ✓ Comfy Mode (Temperature)
- ✓ Air Filter Status
- ✓ Actual Room Temperature
- ✓ Humidity Calibration
- ✓ Zone Controls
- ✓ VoiceControls
- ✓ Comfy Mode (Humidity)
- ✓ Usage Statistics
- ✓ Actual Room Humidity

and many more!

WiFi Thermostat

The MRCOOL® Universal WiFi Thermostat allows you to remotely monitor and control the heating and cooling system in your home or business from anywhere.

- Easy programming
- Universal Compatibility
- 4.17x2.36 Inch Display
- Support 12 Equipments
- Up to 3Heat/2Cool
- 7 Days Programmable with Auto Changeover
- Supports Wi-Fi 802.11 b/g/n @ 2.4GHz
- 24V Hardwire(C terminal)

Pure Cool Breeze Bladeless Fan / Air Purifier

Our bladeless fan provides a continuous flow of clean air through the wide opening. Not only does it eliminate any staged impact or wavy stimulation, it also purifies the air at the same time.

Cool & Clean Air

- Oscillating Fan
- Powerful Airflow
- Captures Pollutants
- Reduces Allergens
- Removes Odors
- Safe Bladeless Design
- Easy Maintenance

- ✓ Quiet Running
- ✓ Fresh Air
- ✓ 8 Speed Remote Control
- ✓ HEPA Double Purification

Cool Blade HVLS Fan

Our HVLS Industrial Fan is an affordable and efficient solution to cool large spaces. The unique tubercle blade design creates greater air volume than other industrial fans on the market. The unit is inexpensive to operate and minimizes the need for expensive duct work in new construction for both heating and cooling systems.

- Up to 24 FT Diameter
- Available in 3 sizes (14, 18, 24FT)
- Reduces temperature by 10° on average
- Includes Multiple Safety Features
- Cost Efficient
- Low Maintenance

Special Truckload Orders

Packaged Terminal

If you have ever stayed in a hotel you have probably experienced the loud clunky sound of the a/c unit turning on. Nobody wants to be jolted out of bed by an alarming sound. That is why MRCOOL® has worked hard to develop our packaged terminal unit that allows you to get the restful sleep you deserve.

- ✓ Quiet Running
- ✓ R410A Refrigerant
- ✓ Electric Heat Included
- ✓ Fresh Air Filter
- ✓ Auto Restart Function
- ✓ Gold Fin® Condenser

AHRI CERTIFIED® www.ahridirectory.org

* Data provided by AHRI

*Truckload Orders Only

SPECIFICATION

MODEL NO.		UNITS	PTHP07325	PTHP09335	PTHP12335	PTHP15335
CAPACITY & PERFORMANCE						
Cooling Capacity		Btu/h	7200 - 6800	9000 - 8800	12000 - 11800	14700 - 14500
EER		Btu/W*h	11.9	11.3	10.5	9.6
Heating Capacity		Btu/h	6000 - 5800	8100 - 7900	10800 - 10500	13500 - 13200
COP			3.4	3.4	3.2	3.0
Noise (Sound Pressure)		dB(A)	50/48/46	50/48/46	53/50/45	53/50/45
Level		dB(A)	61	61	66	66
Supplemental Electric Heat		kW	2.5	3.5	3.5	3.5
ELECTRICAL PARTS						
Power supply		Ph-V-Hz	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60
Minimum Circuit Ampacity		A	14	20	20	20
Connection wiring		AWG	14AWG x 3	12AWG x 3	12AWG x 3	12AWG x 3
Cooling Current Rating		A	2.65/2.76	3.46/3.75	4.97/5.4	6.66/7.26
Heating Current Rating		A	2.25/2.41	3.04/3.28	4.3/4.63	5.74/6.2
Starting Current Rating		A	16	18	25.9	39
DIMENSIONS & WEIGHT						
Dimension	Net	inch	42 x 21 x 16	42 x 21 x 16	42 x 21 x 16	42 x 21 x 16
(WxDxH)	Packing	inch	45 x 25.4 x 19.3	45 x 25.4 x 19.3	45 x 25.4 x 19.3	45 x 25.4 x 18.7
Weight	Net	lbs	101.4	106.9	117.9	120
	Gross	lbs	126.8	132.3	143.3	145.5
REFRIGERANT & PIPING						
Refrigerant Type		--	R410A	R410A	R410A	R410A
Refrigerant Charge		oz	24.69	24.69	31.39	37.04
OPERATION FACTORS						
Cooling Operation Range	Indoor	° F	62-90	62-90	62-90	62-90
	Outdoor	° F	64-109	64-109	64-109	64-109
Heating Operation Range	Indoor	° F	32-80	32-80	32-80	32-80
	Outdoor	° F	23-76	23-76	23-76	23-76

MODEL NO.		UNITS	PTAC07325	PTAC09335	PTAC12335	PTAC15335
CAPACITY & PERFORMANCE						
Cooling Capacity		Btu/h	7300-7100	9200-9000	12000-11800	14700-14500
EER		Btu/W*h	11.9	11.3	10.7	9.5
Heating Capacity		Btu/h	--	--	--	--
COP			--	--	--	--
Noise (Sound Pressure)		dB(A)	50/48/46	50/48/46	52/49/46	53/50/45
Level		dB(A)	61	63	66	66
Supplemental Electric Heat		kW	2.5	3.5	3.5	3.5
ELECTRICAL PARTS						
Power supply		Ph-V-Hz	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60	1 - 208/230 - 60
Minimum Circuit Ampacity		A	14	20	20	20
Connection wiring		AWG	14AWG x 3	12AWG x 3	12AWG x 3	12AWG x 3
Cooling Current Rating		A	3.91	5.9	8.7	10.6
Heating Current Rating		A	--	--	--	--
Starting Current Rating		A	16	18	25.9	39
DIMENSIONS & WEIGHT						
Dimension	Net	inch	42 x 21 x 16	42 x 21 x 16	42 x 21 x 16	42 x 21 x 16
(WxDxH)	Packing	inch	45 x 25.4 x19.3	45 x 25.4 x 19.3	45 x 25.4 x 19.3	45 x 25.4 x 18.7
Weight	Net	lbs	99.2	104.7	115.7	117.9
	Gross	lbs	123.5	130	141.1	143.3
REFRIGERANT & PIPING						
Refrigerant Type		--	R410A	R410A	R410A	R410A
Refrigerant Charge		oz	24.69	24.69	31.39	37.04
OPERATION FACTORS						
Cooling Operation Range	Indoor	° F	62-90	62-90	62-90	62-90
	Outdoor	° F	64-109	64-109	64-109	64-109
Heating Operation Range	Indoor	° F	32-80	32-80	32-80	32-80
	Outdoor	° F	23-76	23-76	23-76	23-76

Window A/C*

- Timer
- Auto Restart Function
- Sleep Mode
- Fresh Air Filter

Portable Heat Pump*

- Timer
- Auto Restart Function
- Turbo Mode
- Leakage Detection
- Versatile Installation
- Sleep Mode
- Auto Swing
- Optional Electric Heat

Portable A/C*

- Timer
- Auto Restart Function
- Turbo Mode
- Leakage Detection
- Versatile Installation
- Sleep Mode
- Auto Swing
- Optional Electric Heat

*Truckload Orders Only

Portable A/C*

- Timer
- Auto Restart Function
- Sleep Mode
- Leakage Detection
- Versatile Installation

Portable Dehumidifier*

- Timer
- Auto Restart Function
- Turbo Mode
- Leakage Detection

Portable Dehumidifier*

- Timer
- Auto Restart Function
- Turbo Mode
- Leakage Detection
- Optional Gold Fin
- Optional Fresh Air Filter

*Truckload Orders Only

Accessories

Some of our most popular MRCOOL® accessories are shown below. Ask our sales team about our full list of available accessories. New ones are added often.

Wall Mounting Brackets

Use a MRCOOL® condenser wall mounting kit to elevate your ductless mini-split away from dirt, debris, and pests. Painted and easy to install, our smaller solid steel brackets can support up to 176 pounds. Our larger brackets can support heavier condensers up to 440 pounds. Both brackets are designed for MrCool ductless systems, but may also work effectively for other ductless condenser products.

LineGuard® Line Set Cover

Our MRCOOL® LineGuard® is a protective line set cover kit for split air conditioners and heat pumps. It is durable, attractive, and easy to install. The LineGuard® protects your lines from various harsh weather conditions and prolonged sun exposure and will extend the life of your system. The kit comes in various measurements so that it can line up with your home's needs. This kit is designed to give the lines of your ductless mini-split a modern finish, allowing your home to upkeep a more attractive exterior.

Propane Conversion Kits

Most furnace systems are meant for use with natural gas, however, depending on a home or business's location, natural gas lines aren't always available. Making changes to a furnace so that it can utilize an alternative fuel is a process that involves the replacement of internal connections and components. The MRCOOL propane conversion kit allows a natural gas furnace to utilize propane gas as its energy source when in a situation that natural gas is not a viable option.

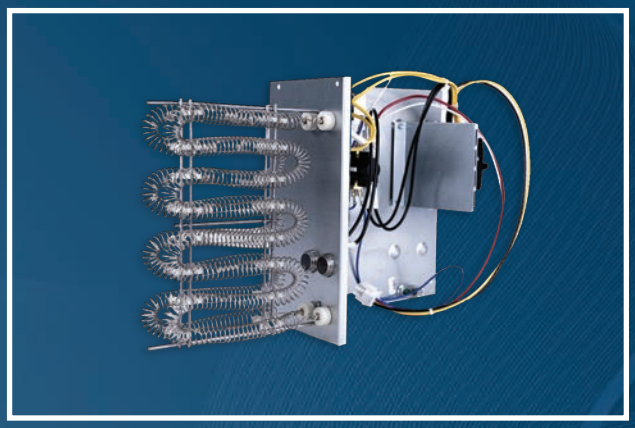

Optional Electric Heat Kits

Want your MRCOOL split system to keep you comfortable all year long? Just add a MRCOOL Electric Heat Kit with Circuit Breaker to your MRCOOL air handling unit. Now you can cool your space when it's hot outside, and heat your space when it's cold with the same HVAC system. MRCOOL product quality means you get nickel chromium heat elements, sequencers for better temperature control, multiple branch circuit capability, and a factory-installed circuit breaker.

48 Remington Way Hickory, KY 42051

270-366-0457

www.mrcool.com