


Multi-Sense® Model 231RS



Wet-to-Wet, Differential, Multi-Configurable Pressure Transducer

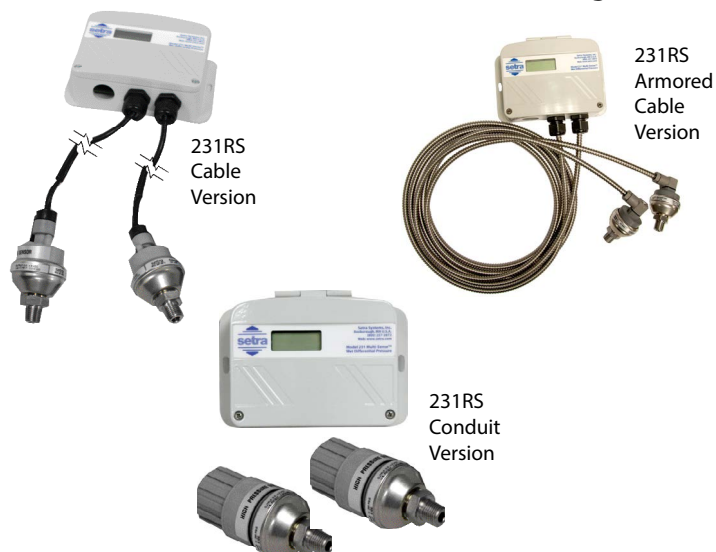

DESCRIPTION

The Model 231RS with remote sensors reduces labor, materials, and time. The sensors are installed directly into the pipe and electrical connection is made between the remote sensors and the Model 231RS via cables or conduit, reducing labor cost by one-third and the cost of copper to connect the pressure transducer to the pipe. Startup time is reduced since purging air out of the lines is not necessary.

The Multi-Sense® Model 231 Wet-to-Wet differential pressure transducer's all inclusive design provides users with field accessible ranging, choice of output and field zeroing.

NOTE: Setra quality standards are based on ANSI-Z540-1. The calibration of this product is NIST traceable.

FEATURES

- Wet-to-Wet Transducer w/ Remote Sensors
- Conduit and Cable Versions
- Field Selectable Output - True 4 to 20 mA, 0 to 5, 1 to 5, and 0 to 10 VDC
- Each Unit Provides 4 Unidirectional and 4 Bi-directional Switch Selectable Pressure Ranges
- Field Accessible Push-Button Zero and Remote Zero
- Jumper Selectable Port Swap
- Optional LCD
- All Cast Aluminum, NEMA4 Rated Housing
- CE and RoHS Compliant



APPLICATIONS

- Energy Management Systems
- Process Control Systems
- Flow Measurement of Various Gases or Liquids
- Liquid Level Measurement of Pressurized Vessels
- Pressure Drop Across Filters

SPECIFICATIONS



Electrical Data (Voltage)		Performance Data						Environmental Data	
Circuit	3-Wire	Accuracy RSS ¹ (at constant temp.)						Operating ³ Temperature °F (°C)	-4 to +185 (-20 to -85)
Excitation	15 to 30 VDC/18 to 30 VAC (Reverse Excitation Protected)	Pressure Ranges A, B, C		±1.0% FS				Storage Temperature °F (°C)	-4 to +185 (-20 to +85)
Output ⁴	0 to 5 VDC, 0 to 10 VDC, 1 to 5 VDC	Pressure Ranges D		±2.0% FS				Vibration	10g from 50Hz to 2000 Hz
Output Impedance	30 Ohms	Pressure Ranges (Selection Example, Pg 4.)						Shock	200g
Circuit Consumption	8 mA (typ.) at 5 VDC, 8 mA (typ) at 10 VDC, 40 mA (typ.) at 18-30 VAC	Range Code	A	B	C	D	Max. Line Pressure	Physical Description	
		RS1	50	25	10	5	50	Case	Die Cast Aluminum, Powder Coated
Electrical Data (Current)		RS2	75	37.5	15	7.5	75	Pressure Fittings	1/4-18 NPT Male
Curcuit	2-wire (Reverse Excitation Protected)	RS3	100	50	20	10	100	Electrical Connection	1/2 in. Conduit
Output ⁵	4 to 20 mA	RS4	150	75	30	15	150	Size	4.0 x 6 x 2 in. (102 x 152 x 51 mm)
External Load	0 to 250 Ohms	RS5	250	125	50	25	250	Weight	1.3 lb
Min. Supply Voltage (VDC)	15 + 0.02 x Resistance of receiver plus line)	Pressure Media						Thermal Effects ²	
Max. Supply Voltage (VDC)	30 + 0.004 x Resistance of receiver plus line)	Liquids or Gases Compatible with 17-4 PH Stainless Steel Note: Hydrogen not recommended for use with 17-4 PH stainless steel						Compensated Range °F (°C)	+32 to +130 (0 to +54)
<div>¹ RSS of Non-Linearity, Hysteresis, and Non-Repeatability.</div> <div>² Units calibrated at nominal 70°F. Maximum thermal error computed from this datum.</div> <div>³ Operating temperature limits of the electronics only. Pressure media temperatures may be considerably higher or lower.</div> <div>⁴ Calibrated into a 50K ohm load, operable into a 5000 ohm load or greater.</div> <div>⁵ Calibrated at factory with a 24 VDC loop supply voltage and a 250 ohm load.</div> <div>Specifications subject to change without notice.</div>								Zero/Span Shift %FS/100°F (50°C)	2.0 (1.8)
								Warm-up Shift	<0.12% FS
								Response Time	1 to 5 sec. (selectable)
								Proof Pressure	2 x Full Scale
								Burst Pressure	15 x Full Scale (50 psi), 10 x Full Scale (75 x 150 psi), 8 x Full Scale (250 psi)

DIMENSIONS

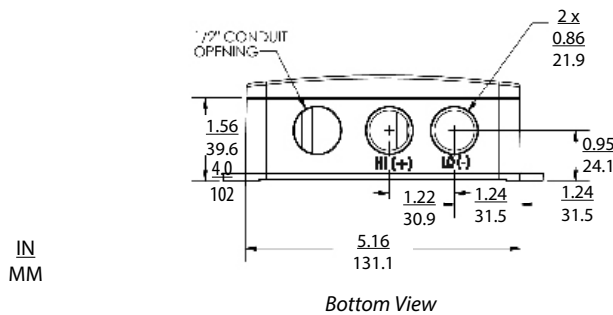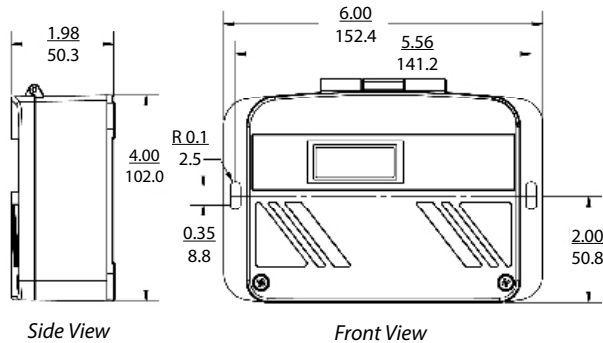


Conduit Version

IN
MM

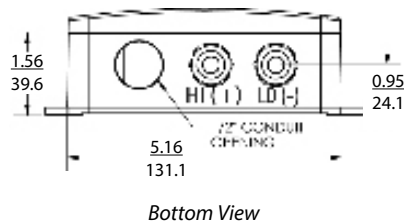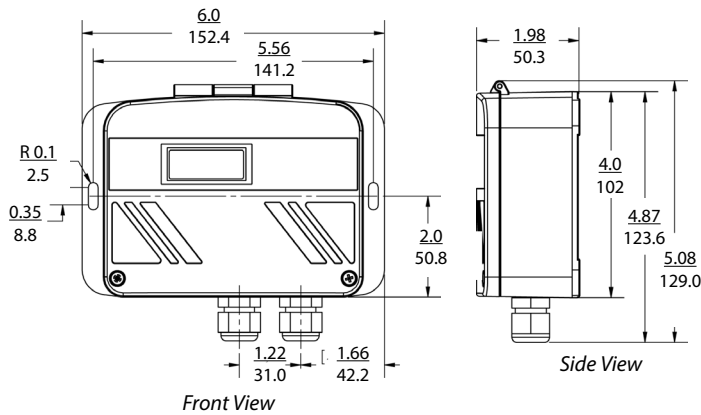


Cable Version

WIRING

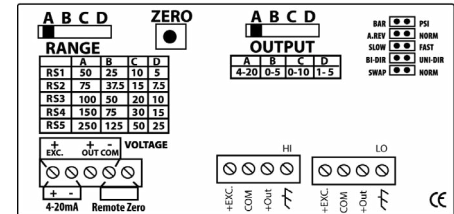

3-Wire - Voltage Output

0 to 5 VDC
0 to 10 VDC
1 to 5 VDC
Remote Zero

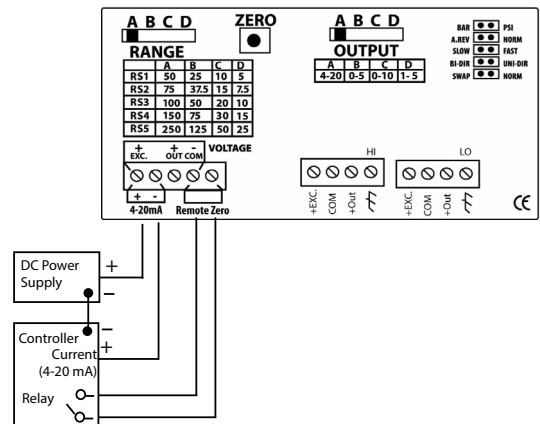

2-Wire - Current Output


4 to 20 mA
Remote Zero

Multi-Sense® Model 231RS




Wet-to-Wet, Differential, Multi-Configurable Pressure Transducer

DIMENSIONS




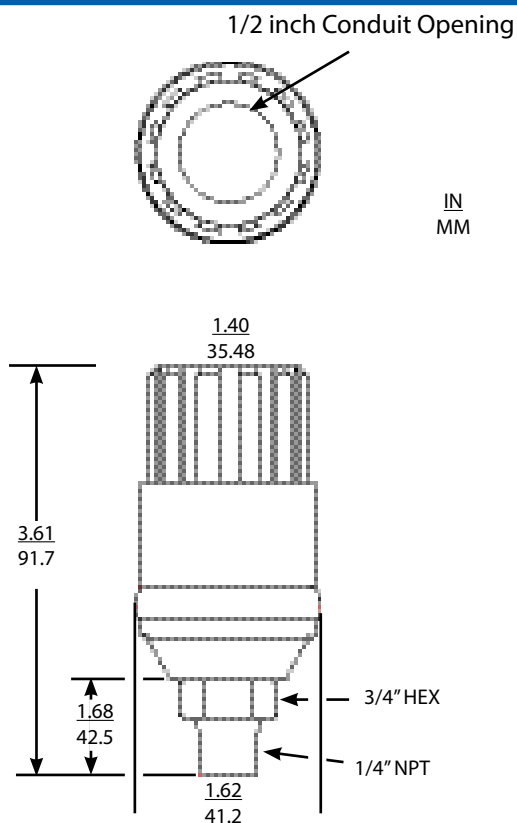


Transducer w/Conduit (3M)

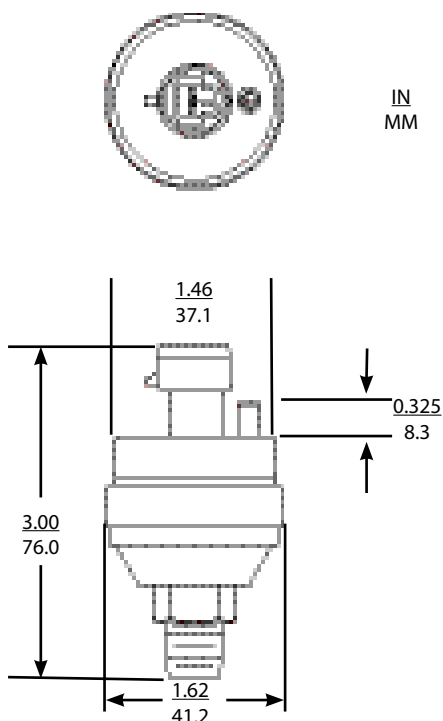


Transducer w/Packard Connector (4M)

WIRING

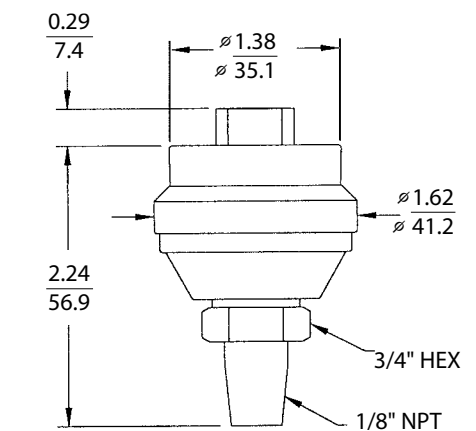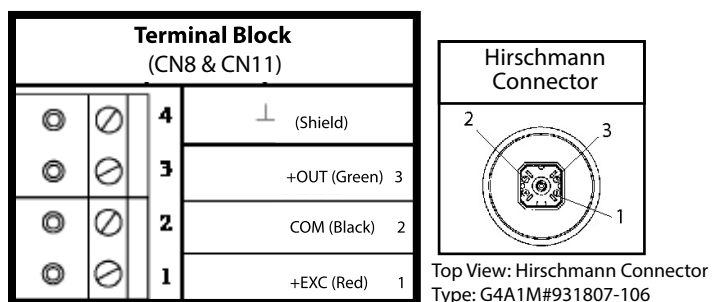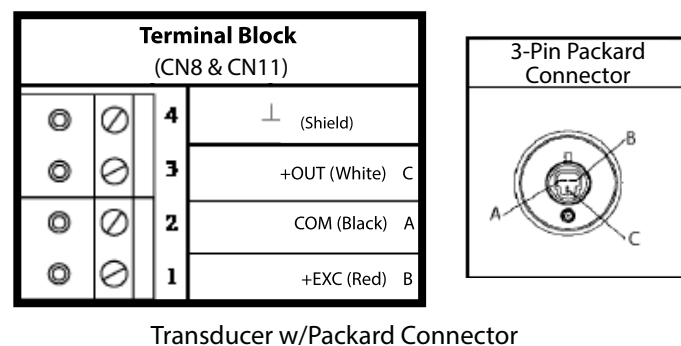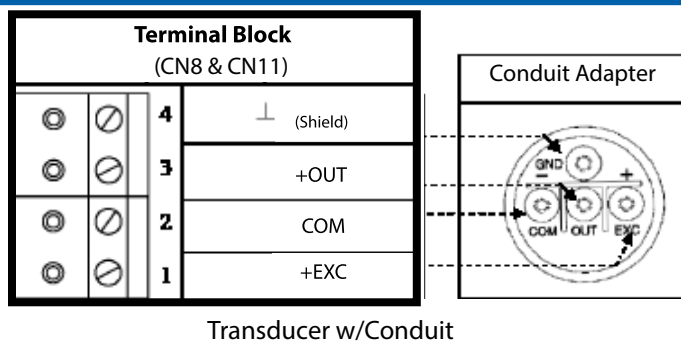

Transducer w/Hirschmann Connector (AJ)

INSTALLATION

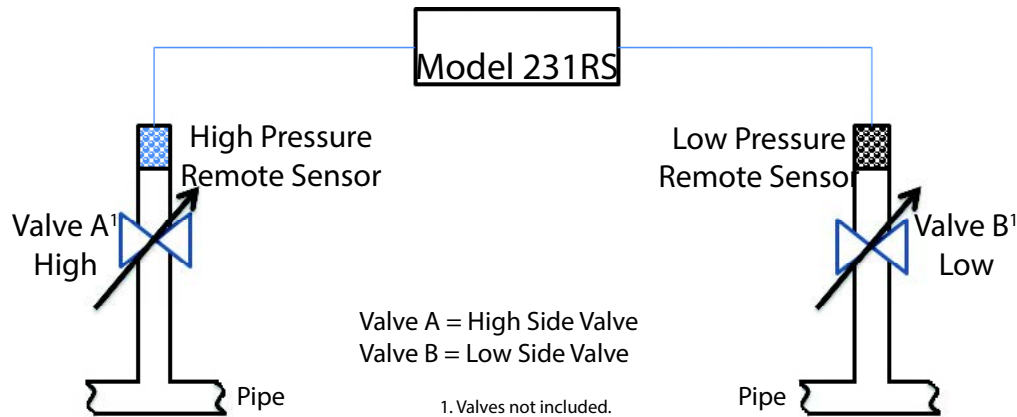

PRESSURE RANGE CODE SELECTOR (IMPORTANT: READ BEFORE ORDERING)

Examine the pressure application and determine what is the Highest System Line Pressure. Determine what is the Differential Pressure being measured. Find the MAX. Line Pressure in the table on the right that is \geq to your Highest System Line Pressure. Verify that your DP falls within the selectable ranges in that row. Follow that row to the left and select that range code.

Range Code	A	B	C	D	Max. Line Pressure
RS1	50	25	10	5	50
RS2	75	37.5	15	7.5	75
RS3	100	50	20	10	100
RS4	150	75	30	15	150
RS5	250	125	50	25	250

Example:

Highest System Line Pressure: 125 psig
 Differential Pressure Measured: 75 psid
 "Max Line Pressure" \geq to System Line Pressure: 150 psid (75 psid DP falls within ranges in this row)
 Select Range Code: RS4

ORDERING INFORMATION

2 3 1 G - - - - -

Model	Range Code	Pressure Connection	Display	Cable ¹
231G = 231RS	See Table 1 Below	3M 1/4-18 NPT Male Remote Sensor (Conduit Version)	Std. N No Display	Std. 10 10ft
		4M 1/4-18 NPT Male Remote Sensor (Cable Version)	Opt. D LCD Display	Opt. 20 20ft
		AJ 1/4-18 NPT Male Remote Sensors (Armored Jacket Version)		Opt. 30 30ft
				Opt.* 40 40ft
				Opt.* 50 50ft

*only available on Armored Jacket Pressure Connection

Ordering Example: 231GRS44MN10 = Model 231RS w/Range Code RS4, 1/4-18 NPT Male Remote Sensor (Cable Version), No Display, 10ft. Cable

Table 1. Range Specification

RANGE CODE ²	UNIDIRECTIONAL PRESSURE RANGES	BIDIRECTIONAL PRESSURE RANGES
RS1	5, 10, 25, 50 psid	$\pm 5, \pm 10, \pm 25, \pm 50$ psid
RS2	7.5, 15, 37.5, 75 psid	$\pm 7.5, \pm 15, \pm 37.5, \pm 75$ psid
RS3	10, 20, 50, 100 psid	$\pm 10, \pm 20, \pm 50, \pm 100$ psid
RS4	15, 30, 75, 150 psid	$\pm 15, \pm 30, \pm 75, \pm 150$ psid
RS5	25, 50, 125, 250 psid	$\pm 25, \pm 50, \pm 125, \pm 250$ psid

1. Cable lengths only available with Pressure Connection Code 4M. 2. For higher ranges contact factory.