


Features:

- The AH4 W-Bank Filter Module is part of a series of modules that can be combined to form a custom multi- functional Air-Handler.
- This Modular approach allows for an adaptive installation as each module can be rotated, minimizing installation cost by adapting to installation needs.
- The AH4-IFWB is double wall constructed Aluminum, making it light (34 **lbs**) yet strong and includes corner mounting screws.
- The Filter Box Assembly is Fiber Glass insulated (R4)
- The AH4-IFWB Filter Module comes with four 24" x 24" x 2" MERV13 Filters*.
- Includes 2 Rear Panel Static Ports to measure the filter differential pressure giving an indication of the status of the filters**.
- Quick Clip Access Panel.
- Round and Square Custom Intake and Exhaust Duct adapters are available;

Call HVACQuick.com @ 888-855-7229 or team@hvacquick.com.

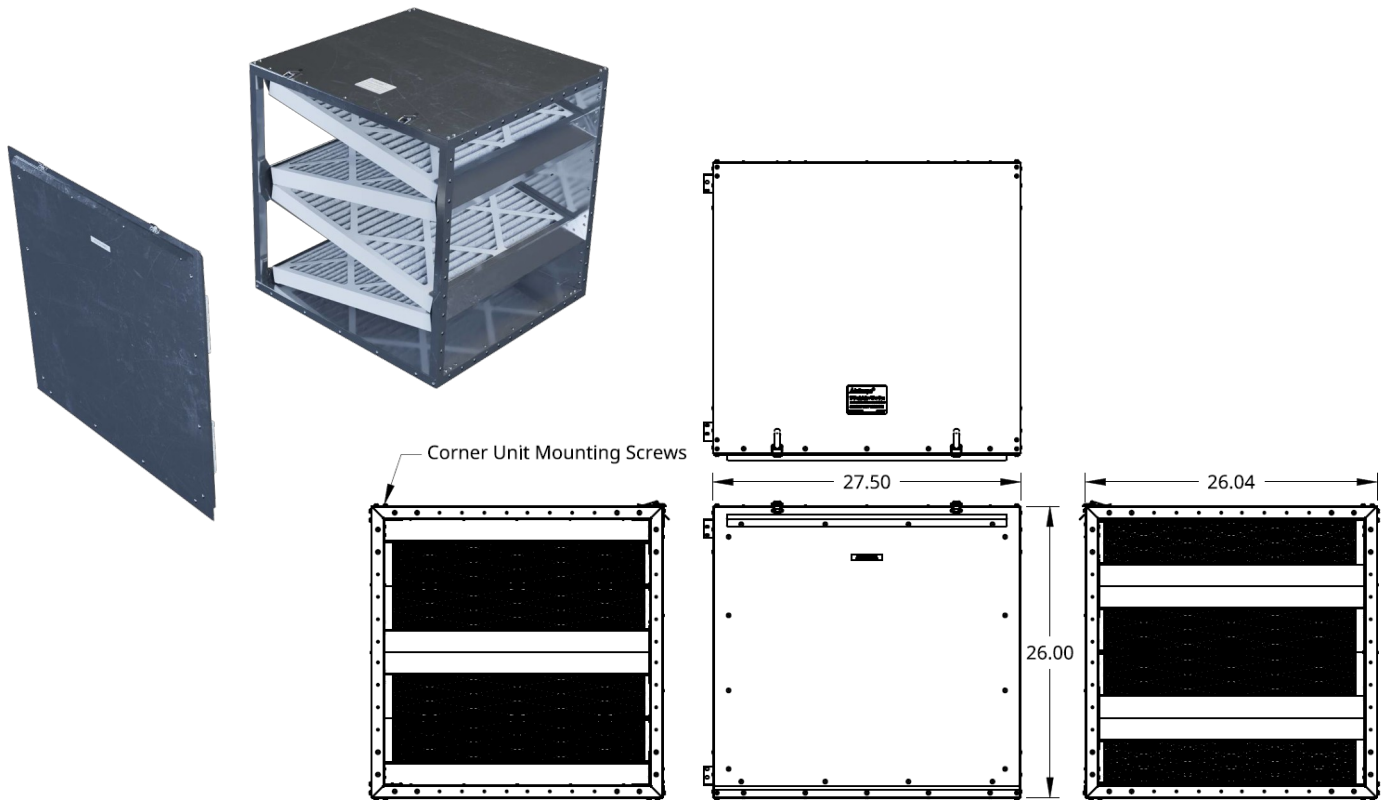

Units are in inches, The Pressure Drop over the MERV13 Filters is 0.2" W.C. @ 4000CFM.

* The W-Bank Filter Module requires **four 23.38" x 23.38" x 1.75" (actual size) Filters**.

** The provided Rear Panel Static Ports can be connected to an analog or digital [manometer](#) to provide indication of the pressure drop over the W-Bank Filters which gives an indication of the filters dirtiness. Depending on your installation and environment you can, over time, create an indication of the dirtiness of your filters. This enables you to quickly read the filtration status and provides awareness about when to change your filters. ALWAYS heat the 1/8" tubing before installing or removing tubing. NOTE: remove the tape sealing the rear ports to use the 1/8" tube barbs underneath.