

The Lifestyle RNC Ventilation Control Part #99-BC-01

The Lifestyle RNC Ventilation Control offers ON/OFF, High Speed/Low speed plus an electronic dehumidistat.

Key Features

- 2 Speed Fan setting (Low/High)
- Electronic Dehumidistat
- Instruction Card is inserted in the control
- Slim-line design
- Connect to 3 wire 20 gauge low voltage wire.

Turning on the Control

Press and release the ON/OFF button. The "ON Indicator Light" will illuminate.

Adjusting the Ventilation Speed

The unit will normally operate at low speed. Press and release the SPEED button to initiate high speed ventilation. The "High Speed Indicator LED" will illuminate.


Humidity Control

Your unit will produce a dehumidifying effect when outdoor humidity levels are lower than indoor humidity levels. Never use the dehumidistat feature when outdoor temperatures are above 59 F (15 C).

Setting the Dehumidistat

Press and release the DEHUMIDISTAT button until the DEHUMIDISTAT LED is at the desired setting. After 5 seconds the dehumidistat light will either flash or be on continuous.

A flashing light indicates the humidity level is higher than the

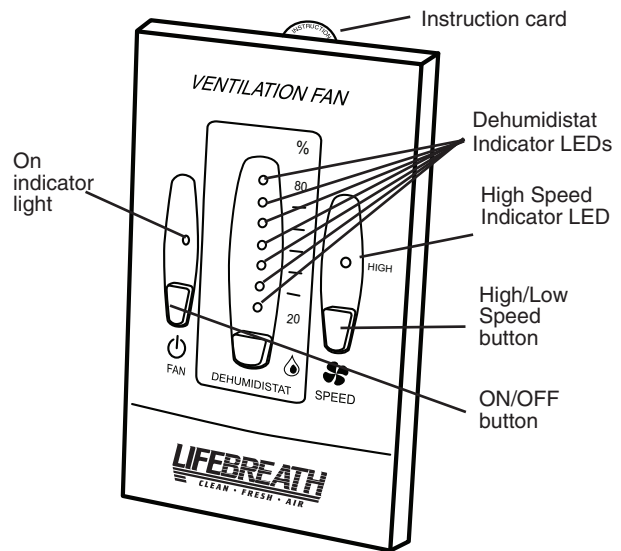

setting and the unit is operating on high speed ventilation. A continuous light indicates the humidity level is lower than the setting. Refer to the unit's Operation & Installation Manual for instructions on how the Dehumidistat works.

Note - Only 1 dehumidistat should be active on a system.

ATTENTION

*Install a jumper between 2 (ON) and 3 (RED) on the HRV terminal block to configure the ON/OFF button to ON/STANDBY. Refer to "Setting Standby when using a Main Control" in this manual.