



**ZONE
MASTER™**
AUTOMATED AIRFLOW CONTROL

ADJUSTABLE MOTORIZED AIRFLOW DAMPERS



24 VAC, 1 RPM,
60 Hz, 6 Watts
Maximum Torque
78 in.-oz.
2 Wire Synchronous
Hysteresis Motor




CONTROL AIRFLOW TO ROOMS THAT ARE TOO HOT OR TOO COLD

The ZoneMaster™ Motorized Adjustable Airflow Damper is mounted in ductwork to control the amount of airflow in an HVAC system or fresh air intake system.



OF U.S. & IMPORTED PARTS

- Adjustable close or open position range stops
- Shipped as power closed/spring return or power open/spring return
- Available in 4", 6", 8", 10" & 12" diameters
- Male crimped and female uncrimped ends to connect to rigid or flexible round duct
- 20 gauge blade closes against gasket for minimal leakage
- Simple easy-to-wire, two wire installation
- Safe, UL listed 24V 15VA stud mount transformer included (models with X do not include transformer)
- Tremendous energy saver
- Free-wheeling coupling for long life
- 8" long metal housing

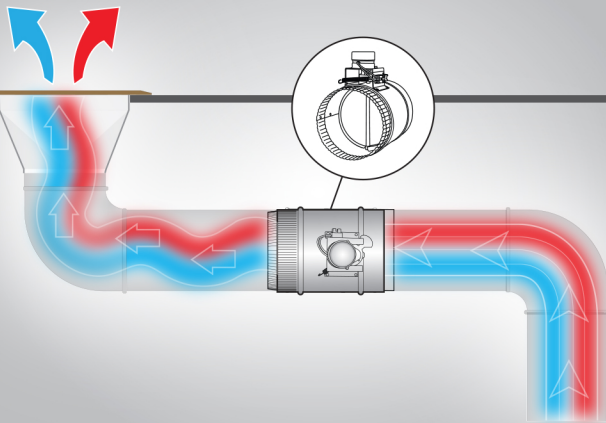

Model	Diameter	Power "OFF"	Housing Gauge
ZC204	4"	Closed	25
ZC204X	4"	Closed	25
ZO204	4"	Open	25
ZC206	6"	Closed	25
ZC206X	6"	Closed	25
ZO206	6"	Open	25
ZC208	8"	Closed	25
ZC208X	8"	Closed	25
ZO208	8"	Open	25

Model	Diameter	Power "OFF"	Housing Gauge
ZC210	10"	Closed	22
ZC210X	10"	Closed	22
ZO210	10"	Open	22
ZC212	12"	Closed	22
ZC212X	12"	Closed	22
ZO212	12"	Open	22

Models with X do not include the 24v transformer

QUALITY | COMFORT | CONTROL

CATDamper-0125